

Mixed hp - FEM on anisotropic meshes II:
Hanging nodes and tensor products of boundary
layer meshes

D. Schötzau, C. Schwab and R. Stenberg¹

Research Report No. 97-14
October 1997

Seminar für Angewandte Mathematik
Eidgenössische Technische Hochschule
CH-8092 Zürich
Switzerland

¹Institut für Mathematik und Geometrie, Universität Innsbruck, Technikerstrasse 13, A-6020
Innsbruck, Austria

Mixed hp - FEM on anisotropic meshes II:
Hanging nodes and tensor products of boundary layer meshes

D. Schötzau, C. Schwab and R. Stenberg¹

Seminar für Angewandte Mathematik
Eidgenössische Technische Hochschule
CH-8092 Zürich
Switzerland

Research Report No. 97-14

October 1997

Abstract

Divergence stability of mixed hp -FEM for incompressible fluid flow for a general class of possibly highly irregular meshes is shown. The meshes may be refined anisotropically and contain hanging nodes on geometric patches. The inf-sup constant is independent of the aspect ratio of the elements and the dependence on the polynomial degree is given explicitly. Numerical estimates of inf-sup constants confirm our results.

Keywords: hp -Finite Elements, Mixed FEM, anisotropic meshes, tensor product meshes, hanging nodes

Mathematics Subject Classification (1991): 65N30, 65N35

¹Institut für Mathematik und Geometrie, Universität Innsbruck, Technikerstrasse 13, A-6020 Innsbruck, Austria

1 Introduction

The efficient numerical computation of problems in fluid mechanics exhibiting boundary layer or corner singularity phenomena requires properly designed meshes. It is well-known (see, e.g., [8, 14] and the references therein) that exponential convergence for corner singularities can be obtained by the use of increasing polynomial degree and of meshes which are geometrically refined towards the corners. Recently, refinement strategies using irregular meshes with hanging nodes became very attractive (see, e.g., [2, 3, 11]). On the other hand, anisotropic meshes with cells of extremely high aspect ratio are very well suited for the resolution of boundary layers (see, e.g., [15, 17]).

As it is well-known, stability of mixed hp -FEM discretizations for viscous incompressible fluid flow is guaranteed as long as a discrete inf-sup condition is satisfied by the velocity and pressure spaces. For many pairs of velocity and pressure spaces this inf-sup condition has been established (see [18, 5, 7] and the references there for h -version FEM and [4, 19, 20, 16] and the references there for p -version/spectral FEM). Nevertheless, almost all the presently available techniques for establishing divergence stability seem to require the regularity of the meshes in some sense (see [3] for some results on anisotropic meshes). This precludes, of course, anisotropic and irregular meshes as described above. Recently, some attention has been turned to this issue and it has been proved by Becker and Rannacher [2, 3] that a certain nonconforming low order element is indeed stable independent of the element aspect ratio on axiparallel meshes. In [13] we proved stability for hp -elements independent of the aspect ratio on anisotropic mesh patches.

In this paper the earlier work [13] is extended and we present a family of conforming hp velocity and pressure spaces which is divergence stable on a quite general class of anisotropic, possibly irregular meshes. We allow geometric mesh patches with hanging nodes as well as anisotropic refinements. In order to resolve both, boundary layers and corner singularities, we prove the divergence stability of hp -FEM on tensor products of geometrically refined meshes. First, the discrete inf-sup condition for low order elements with hanging nodes is proved with an inf-sup constant depending only on the geometrical grading factor. To do this, we introduce an interpolant of Clément type on geometric meshes with hanging nodes which is of independent interest. Second, with the aid of a macro-element technique corresponding stability results for hp -FEM are obtained. Also, the dependence of the inf-sup constant on the polynomial degree k is given explicitly, that is we show that the inf-sup constant is bounded from below by $Ck^{-\frac{1}{2}}$ if the mesh contains no triangles and by Ck^{-3} otherwise. Numerical estimates of inf-sup constants indicate the sharpness of our results and the dependence on the geometrical grading factor σ .

The outline of the paper is as follows: In Section 2 we formulate the Stokes problem and define the meshes and spaces to be analyzed. In Section 3 our main result is given and a numerical example is considered. In Section 4 we establish stability results on reference meshes which implies by a macro-element technique our main result.

The usual notation is used in this paper: For a polygonal domain $D \subseteq \mathbb{R}^2$ or an interval $D = (a, b)$ we denote by $H^k(D)$ the Sobolev spaces of integer orders $k \geq 0$ equipped with the usual norms $\|\cdot\|_{k,D}$ and seminorms $|\cdot|_{k,D}$, $H^0(D) = L^2(D)$, $H_0^1(D) = \{u \in H^1(D) : \text{trace}(u) = 0 \text{ on } \partial D\}$, $L_0^2(D) = \{p \in L^2(D) : (p, 1)_D = 0\}$ where $(\cdot, \cdot)_D$ denotes the $L^2(D)$ inner product. For $s \geq 0$ nonintegral, the Sobolev spaces $H^s(D)$ with norm $\|\cdot\|_{s,D}$ are defined as usually via the K -method of interpolation (see, e.g., [23] or [10]). The set of all

polynomials of total degree $\leq k$ on $D \subseteq \mathbb{R}^2$ is denoted by $\mathcal{P}_k(D)$, the set of all polynomials of degree $\leq k$ in each variable by $\mathcal{Q}_k(D)$. If I is an interval we define $\mathcal{P}_k(I)$ as the set of polynomials on I of degree $\leq k$. In the following we denote by C generic constants not necessarily identical at different places but always independent of the meshwidths and the polynomial degrees.

2 Problem Formulation

2.1 Stokes Problem

In a bounded, polygonal domain $\Omega \subset \mathbb{R}^2$ we consider the *Stokes* boundary value problem for incompressible fluid flow: Find a velocity field \vec{u} and a pressure p such that

$$-\nu \Delta \vec{u} + \nabla p = \vec{f} \quad \text{in } \Omega, \quad (1)$$

$$\nabla \cdot \vec{u} = 0 \quad \text{in } \Omega, \quad (2)$$

$$\vec{u} = 0 \quad \text{on } \partial\Omega. \quad (3)$$

Here, $\nu > 0$ is the kinematic viscosity which is related to the Reynolds number Re of the flow by $\nu = 1/Re$. The right hand side \vec{f} is a given body force per unit mass. The usual mixed formulation of (1)-(3) is the following:

Find $\vec{u} \in H_0^1(\Omega)^2$ and $p \in L_0^2(\Omega)$ such that

$$\nu (\nabla \vec{u}, \nabla \vec{v})_\Omega - (p, \nabla \cdot \vec{v})_\Omega = (\vec{f}, \vec{v})_\Omega, \quad (4)$$

$$(q, \nabla \cdot \vec{u})_\Omega = 0 \quad (5)$$

for all $(\vec{v}, q) \in H_0^1(\Omega)^2 \times L_0^2(\Omega)$.

It is well-known (see, e.g., [7, 14]) that for $\vec{f} \in L^2(\Omega)^2$ there exists a unique weak solution (\vec{u}, p) of (4)-(5) due to the continuous *inf-sup condition*

$$\inf_{0 \neq p \in L_0^2(\Omega)} \sup_{0 \neq \vec{v} \in H_0^1(\Omega)^2} \frac{(\nabla \cdot \vec{v}, p)_\Omega}{|\vec{v}|_{1,\Omega} \|p\|_{0,\Omega}} \geq C(\Omega) > 0. \quad (6)$$

A conforming FE-discretization of (4)-(5) is obtained in the usual way: Given finite dimensional subspaces $\vec{V}_N \subseteq H_0^1(\Omega)^2$ and $M_N \subseteq L_0^2(\Omega)$, find $(\vec{u}_N, p_N) \in \vec{V}_N \times M_N$ such that (4)-(5) holds for any $(\vec{v}, q) \in \vec{V}_N \times M_N$. A family $\{\vec{V}_N \times M_N\}_N$ is $\gamma(N)$ -*stable*, if the following *discrete inf-sup condition* holds

$$\inf_{0 \neq p \in M_N} \sup_{0 \neq \vec{v} \in \vec{V}_N} \frac{(\nabla \cdot \vec{v}, p)_\Omega}{|\vec{v}|_{1,\Omega} \|p\|_{0,\Omega}} \geq \gamma(N) > 0. \quad (7)$$

If $\gamma(N)$ in (7) does not depend on N , we say that the family $\{\vec{V}_N \times M_N\}_N$ is *stable*. If a family is $\gamma(N)$ -stable the discrete problem has a unique solution (\vec{u}_N, p_N) in $\vec{V}_N \times M_N$ and the rate of convergence of the FE approximations $\{(\vec{u}_N, p_N)\}_N$ of (\vec{u}, p) is determined by that of the best approximations of (\vec{u}, p) in $\{\vec{V}_N \times M_N\}_N$, i.e. we have the error estimates [5, 14]

$$\|\vec{u} - \vec{u}_N\|_{1,\Omega} \leq C\gamma^{-1}(N) \inf_{\vec{v} \in \vec{V}_N} \|\vec{u} - \vec{v}\|_{1,\Omega} + C\nu^{-1} \inf_{q \in M_N} \|p - q\|_{0,\Omega}, \quad (8)$$

$$\|p - p_N\|_{0,\Omega} \leq C\nu\gamma^{-2}(N) \inf_{\vec{v} \in \vec{V}_N} \|\vec{u} - \vec{v}\|_{1,\Omega} + C\gamma^{-1}(N) \inf_{q \in M_N} \|p - q\|_{0,\Omega} \quad (9)$$

with $C = C(\Omega)$ independent of N and ν .

2.2 Finite Element Spaces

We define the velocity-pressure space pairs $\vec{V}_N \times M_N$ to be analyzed below.

2.2.1 Preliminaries

A *mesh* \mathcal{T} on a bounded polygonal domain $\Omega \subset \mathbb{R}^2$ is a partition of Ω into disjoint and open quadrilateral and/or triangular elements $\{K\}$ such that $\overline{\Omega} = \cup_{K \in \mathcal{T}} \overline{K}$. The mesh \mathcal{T} is called *regular* if for any two elements $K, K' \in \mathcal{T}$ the intersection $\overline{K} \cap \overline{K'}$ is either empty, a single vertex or an entire side. Otherwise, the mesh \mathcal{T} contains *hanging nodes* and is called *irregular*. We denote by h_K the diameter of the element K and by ρ_K the diameter of the largest circle inscribed into K . The *meshwidth* h of \mathcal{T} is given by $h = \max_{K \in \mathcal{T}} h_K$. The fraction $\sigma_K := \frac{h_K}{\rho_K}$ is the *aspect ratio* of the cell K . A (regular or irregular) mesh \mathcal{T} is called κ -*uniform* if there exists $\kappa > 0$ such that

$$\max_{K \in \mathcal{T}} \sigma_K \leq \kappa < \infty. \quad (10)$$

\mathcal{T} is called an *affine* mesh if each $K \in \mathcal{T}$ is affine equivalent to a reference element \hat{K} which is either the reference triangle $\hat{T} = \{(x, y) : 0 < x < 1, 0 < y < x\}$ or the reference square $\hat{Q} = (0, 1)^2$, i.e. $K = F_K(\hat{K})$ with F_K affine.

2.2.2 Reference meshes

Our *hp*-FEM will be based on certain two-level families of meshes: a macroscopic κ -uniform mesh denoted \mathcal{T}_m which will be locally refined either towards corners or towards the boundary. To this end we introduce now some meshes on the reference elements \hat{Q} and \hat{T} (which are the reference elements for \mathcal{T}_m). Most of these reference meshes are irregular or contain anisotropic elements.

Definition 2.1 *Let $n \in \mathbb{N}_0$ and $\sigma \in (0, 1)$. On \hat{Q} , the (irregular) geometric mesh $\Delta_{n,\sigma}$ with $n + 1$ layers and grading factor σ is created recursively as follows: If $n = 0$, $\Delta_{0,\sigma} = \{\hat{Q}\}$. Given $\Delta_{n,\sigma}$ for $n \geq 0$, $\Delta_{n+1,\sigma}$ is generated by subdividing that square $K \in \Delta_{n,\sigma}$ with $0 \in \overline{K}$ into four smaller rectangles by dividing the sides of K in a $\sigma : (1 - \sigma)$ ratio.*

The (regular) geometric mesh $\hat{\Delta}_{n,\sigma}$ is obtained from $\Delta_{n,\sigma}$ by removing the hanging nodes as indicated in Figure 2.1.

In Figure 2.1 the geometric mesh is shown for $n = 3$ and $\sigma = 0.5$. Clearly, $\Delta_{n,\sigma}$ is an irregular affine mesh, it contains *hanging nodes*. The elements of the geometric mesh $\Delta_{n,\sigma}$ are numbered as in Figure 2.1, i.e.

$$\Delta_{n,\sigma} = \{\Omega_{11}\} \cup \{\Omega_{ij} : 1 \leq i \leq 3, 2 \leq j \leq n + 1\}. \quad (11)$$

The elements Ω_{1j} , Ω_{2j} and Ω_{3j} constitute the *layer* j .

Definition 2.2 *Let \mathcal{T}_x be an arbitrary mesh on $I = (0, 1)$, given by a partition of I into subintervals $\{K_x\}$. On \hat{Q} , the boundary layer mesh $\Delta_{\mathcal{T}_x}$ is the product mesh*

$$\Delta_{\mathcal{T}_x} = \{K : K = K_x \times I, K_x \in \mathcal{T}_x\}.$$

Figure 2.2 shows a typical boundary layer mesh. We emphasize that any \mathcal{T}_x is allowed. In particular, rectangles of arbitrary high aspect ratio can be used such that boundary layer meshes are not κ -uniform.

Definition 2.3 Let $n \in \mathbb{N}_0$ and $\sigma \in (0, 1)$. On $I = (0, 1)$, let $\mathcal{T}_{n,\sigma}$ be the one dimensional geometric mesh refined towards 0 given by a partition of I into subintervals $\{I_j\}_{j=1}^{n+1}$ where

$$I_j = (x_{j-1}, x_j) \quad \text{with } x_0 = 0 \text{ and } x_j = \sigma^{n+1-j}, j = 1, \dots, n+1.$$

On \hat{Q} , the geometric tensor product mesh $\Delta_{n,\sigma}^2$ is then given by $\mathcal{T}_{n,\sigma} \otimes \mathcal{T}_{n,\sigma}$, i.e.

$$\Delta_{n,\sigma}^2 = \{I_j \times I_k : I_j \in \mathcal{T}_{n,\sigma}, I_k \in \mathcal{T}_{n,\sigma}\}.$$

The tensor product mesh $\Delta_{n,\sigma}^2$ contains anisotropic rectangles with arbitrary large aspect ratio (see Figure 2.2). For the proof of the inf-sup conditions ahead, it is important that $\Delta_{n,\sigma}^2$ can be understood as the geometric mesh $\Delta_{n,\sigma}$ into which appropriately scaled versions of boundary layer meshes $\Delta_{\mathcal{T}_x}$ are inserted to remove the hanging nodes. A geometric tensor product mesh is shown in Figure 2.2 with $n = 5$ and $\sigma = 0.5$. The underlying geometric mesh $\Delta_{n,\sigma}$ is indicated by bold lines.

Remark 2.4 The geometric meshes $\Delta_{n,\sigma}$, $\tilde{\Delta}_{n,\sigma}$ and the tensor product mesh $\Delta_{n,\sigma}^2$ can also be defined on the reference triangle \hat{T} . This is shown in Figure 2.3. On the reference square \hat{Q} we can even admit mixtures of geometric tensor product meshes and geometric meshes as illustrated in Figure 2.4. Of course, other combinations are imaginable.

2.2.3 Geometric boundary layer meshes

Definition 2.5 Consider a (coarse) κ -uniform affine mesh \mathcal{T}_m on a bounded polygonal domain $\Omega \subset \mathbb{R}^2$. An affine mesh \mathcal{T} on Ω is called geometric boundary layer mesh with macro-element mesh \mathcal{T}_m if \mathcal{T} is obtained from \mathcal{T}_m in the following way: Some elements $K \in \mathcal{T}_m$ are further partitioned into $F_K(\hat{\mathcal{T}})$ where $\hat{\mathcal{T}}$ is any of the possibly irregular affine reference meshes on \hat{K} as introduced in the previous subsection (Definitions 2.1, 2.2, 2.3 and Remark 2.4) and F_K is the affine mapping between \hat{K} and K .

The elements of \mathcal{T}_m are called macro-elements. If no macro-element in \mathcal{T}_m is further refined the notion “geometric boundary layer mesh” reduces to the already introduced notion of “ κ -uniform affine meshes” (such meshes can of course also contain geometric refinements but they are not allowed to have anisotropic elements). Also the notion of “macro-elements” becomes in that case unnecessary. “Geometric boundary layer meshes” are a very general class of possibly highly irregular and anisotropic meshes. We will show below that they are well suited for the effective resolution of boundary layer and corner singularity phenomena, i.e. the hp -FEM based on such meshes can resolve boundary layers and corner singularities at an exponential rate. Typically, mesh-patches from \mathcal{T}_m near the boundary of the domain are partitioned anisotropically using $\Delta_{\mathcal{T}_x}$ -meshes to approximate boundary layers. Patches near corners are geometrically refined towards the corners with the meshes $\Delta_{n,\sigma}$ or $\Delta_{n,\sigma}^2$. This takes into account boundary layers as well as the singular behaviour of the solution near a corner. In the interior of the domain a simple κ -uniform mesh can be used. Some examples of geometric boundary layer meshes are shown in Figures 2.5 and 2.6.

Remark 2.6 Of course, other reference meshes are imaginable for the further local refinement in the macro-elements. As long as these reference meshes are divergence stable (cf. the macro-element technique in Proposition 4.11) they can be added to the “family of local refinement strategies”. Further, we remark that no restriction on the regularity of the mesh between two adjacent macro-elements is imposed (even if one demands the macro-element mesh to be regular). For example, a mesh as in Figure 2.7 is admissible.

2.2.4 hp -FEM spaces

We introduce the hp -FEM spaces to be investigated later on. Therefore, let \mathcal{T} be an affine mesh on Ω . With each element $K \in \mathcal{T}$ we associate a polynomial degree k_K . All degrees are combined into a degree vector

$$\underline{k} = \{k_K : K \in \mathcal{T}\} \quad (12)$$

and we put $|\underline{k}| = \max \{k_K : K \in \mathcal{T}\}$.

We define the velocity and pressure spaces

$$S^{\underline{k},1}(\Omega, \mathcal{T}) := \left\{ u \in H^1(\Omega) : u|_K \circ F_K \in \begin{cases} \mathcal{Q}_{k_K}(\hat{Q}) & \text{if } K \text{ is a quadrilateral} \\ \mathcal{P}_{k_K}(\hat{T}) & \text{if } K \text{ is a triangle} \end{cases} \quad \forall K \in \mathcal{T} \right\} \quad (13)$$

and

$$S^{\underline{k},0}(\Omega, \mathcal{T}) := \left\{ p \in L^2(\Omega) : p|_K \circ F_K \in \begin{cases} \mathcal{Q}_{k_K}(\hat{Q}) & \text{if } K \text{ is a quadrilateral} \\ \mathcal{P}_{k_K}(\hat{T}) & \text{if } K \text{ is a triangle} \end{cases} \quad \forall K \in \mathcal{T} \right\}. \quad (14)$$

Implementationally, some care is required to ensure interelement continuity in (13) if k_K is variable. In some elements the external (or side) modes in the polynomial spaces must be reduced whereas the internal (or bubble) modes are of full degree k_K . This can be achieved by introducing edge-degrees as in [14].

We set further

$$S_0^{\underline{k},1}(\Omega, \mathcal{T}) = S^{\underline{k},1}(\Omega, \mathcal{T}) \cap H_0^1(\Omega), \quad S_0^{\underline{k},0}(\Omega, \mathcal{T}) = S^{\underline{k},0}(\Omega, \mathcal{T}) \cap L_0^2(\Omega).$$

If the polynomial degree is constant throughout the mesh \mathcal{T} (i.e. $k_K = k \forall K \in \mathcal{T}$), we use the shorthand notations $S^{k,1}(\Omega, \mathcal{T})$ and $S^{k,0}(\Omega, \mathcal{T})$.

3 Main result

3.1 Stability

In this section our main result on the divergence stability of $S^{\underline{k},1}(\Omega, \mathcal{T})^2 \times S^{\underline{k}-2,0}(\Omega, \mathcal{T})$ on a geometric boundary layer mesh \mathcal{T} with underlying macro-element mesh \mathcal{T}_m is stated. Let $K \in \mathcal{T}_m$ be a macro-element and \mathcal{T}_K the restriction of \mathcal{T} to K . We allow general polynomial degree distributions \underline{k} as in (12) on \mathcal{T} which satisfy

- (i) If $\mathcal{T}_K = F_K(\Delta_{\mathcal{T}_x})$ then \underline{k} is constant on \mathcal{T}_K .

- (ii) If $\mathcal{T}_K = F_K(\Delta)$ where the reference mesh Δ on \hat{K} contains anisotropic elements and has an underlying geometric mesh $\Delta_{n,\sigma}$ (e.g. $\Delta = \Delta_{n,\sigma}^2$) then \underline{k} is constant on $F_K(\Delta_{n,\sigma})$.

Theorem 3.1 *Let \mathcal{T} be a geometric boundary layer mesh on a bounded polygonal domain $\Omega \subset \mathbb{R}^2$ such that the underlying macro-element mesh \mathcal{T}_m is regular and κ -uniform for $\kappa > 0$. Assume that all the geometric refinements in \mathcal{T} are obtained with a fixed grading factor $\sigma \in (0, 1)$. Let \underline{k} be a polynomial degree distribution on \mathcal{T} which satisfies (i) and (ii) above and let $|\underline{k}| = \max \{k_K : K \in \mathcal{T}\}$. Then there exists a constant $C > 0$ (depending only on κ, σ and Ω) such that the spaces*

$$\vec{V}_N = S_0^{k,1}(\Omega, \mathcal{T})^2, \quad M_N = S_0^{k-2,0}(\Omega, \mathcal{T}) \quad (15)$$

satisfy the inf-sup condition (7) with $\gamma(N) \geq C |k|^{-\alpha}$ where $\alpha = \frac{1}{2}$ if \mathcal{T} does not contain triangles and $\alpha = 3$ otherwise.

We will prove this theorem in Section 4 using a macro-element technique (cf. Proposition 4.11 ahead). The main difficulty is to establish local stability results on the reference meshes.

Remark 3.2 Although a geometric boundary layer mesh \mathcal{T} may contain anisotropic mesh-patches, the inf-sup constant in Theorem 3.1 is independent of the element aspect-ratio in such a patch.

Remark 3.3 We could also allow for different geometric grading factors σ in the geometrically refined patches. As long as σ is bounded away from 1 and 0 Theorem 3.1 still holds. This is for example satisfied if only finitely many macro-elements are refined geometrically. More general families of reference meshes are of course admissible for the local refinement of the macro-elements, provided they are patchwise divergence stable as will be explained in Section 4.

Remark 3.4 In particular, Theorem 3.1 states divergence stability on κ -uniform regular meshes consisting of affine triangles and quadrilaterals, which is already well-known (cf. [16] for the hp -version).

Remark 3.5 The inf-sup constant in Theorem 3.1 depends on the geometric grading factor σ . The following numerical example indicates that one can not expect to remove this dependence. We calculated inf-sup constants for $[\mathcal{Q}_2]^2 \times \mathcal{Q}_0$ elements (that is piecewise quadratic velocities and piecewise constant pressure) on the basic geometric mesh $\Delta_{1,\sigma}$ which consists (with the numbering in (11)) of the four quadrilaterals

$$\begin{aligned} \Omega_{11} &= (0, \sigma) \times (0, \sigma), & \Omega_{22} &= (\sigma, 1) \times (0, \sigma), \\ \Omega_{12} &= (\sigma, 1) \times (\sigma, 1), & \Omega_{32} &= (0, \sigma) \times (\sigma, 1). \end{aligned}$$

In Figure 3.8 the inf-sup constants are plotted for $\sigma \in (0, 1)$. The inf-sup constants $C(\sigma)$ deteriorate as σ approaches $\sigma = 0$ or $\sigma = 1$. The graph indicates clearly that one can not bound the inf-sup constant uniformly in $\sigma \in (0, 1)$ although the boundary layer meshes $\Delta_{\mathcal{T}_x}$ are stable independently of the aspect ratio [13]. In that sense we expect our results to be sharp. Figure 3.8 suggests in fact that $C(\sigma) \geq K \sqrt{\sigma(1-\sigma)}$ with $K \approx 1.4$ independent of $\sigma \in (0, 1)$.

3.2 Consistency

With the geometric tensor product meshes near corners one wants to approximate boundary layers and corner singularities at an exponential rate. They arise for example in solutions of the full, incompressible Navier-Stokes equations near walls with no-slip boundary conditions. The precise asymptotic structure of such solution components is not available in general (see [21, 22] where boundary layers appearing at large Reynolds number in Oseen type equations in a two dimensional channel are studied). Therefore, we consider here only a very simple model situation and emphasize that the subsequent arguments are intended only as an illustration that solution components which typically arise in viscous, incompressible flow mandate the meshes considered here and can be approximated at an exponential rate. Our stability analysis does not deal, however, with advective effects which arise for example in the Oseen approximation of the Navier-Stokes equations. Here an additional stabilization of the scheme may be necessary at small ν . We consider only the approximation of one component of the velocity field, similar statements hold also for the pressure [12].

Let $\Delta_{n,\sigma}^2$ be the tensor product mesh on the unit square \hat{Q} geometrically refined towards the origin (cf. Definition 2.3 and Figure 2.2). We assume that the solution $u \in H^1(\hat{Q})$ consists of two exponential boundary layers and one corner singularity component, i.e. u is of the form

$$\begin{aligned} u(x, y) &= u_c(x, y) + u_{b_1}(x, y) + u_{b_2}(x, y) \\ &= u_c(x, y) + C_1(y) \exp(-x/d) + C_2(x) \exp(-y/d). \end{aligned} \quad (16)$$

Here, C_1 and C_2 are analytic functions on $[0, 1]$ and $d = \sqrt{\nu} = 1/\sqrt{Re} \in (0, 1]$ is a small parameter related to the Reynolds number Re that can approach zero. $u_c(x, y)$ is a corner singularity function independent of d which we assume to belong to the countably normed space

$$u_c \in \mathcal{B}_\beta^2(\hat{Q}). \quad (17)$$

We refer to [1, 9] for the exact definition of these spaces. In polar coordinates (r, φ) near the origin the function u_c is typically of the form $u_c = r^\alpha \Phi(\varphi)$ for some $\alpha \in (0, 1)$ and some analytical function $\Phi(\varphi)$. In such a case, (17) is satisfied. If the number n of layers is related linearly to the polynomial degree k , i.e. $k = [Cn]$ for some $C > 0$, we have on the underlying geometric mesh $\Delta_{n,\sigma}$ with hanging nodes the following approximation property (see [8, 14]):

$$\inf_{v \in S^{k,1}(\hat{Q}, \Delta_{n,\sigma})} \|u_c - v\|_{1,\hat{Q}} \leq K \exp(-bk) \quad (18)$$

where K and b are independent of k and d . Since $\Delta_{n,\sigma}^2$ is finer than $\Delta_{n,\sigma}$, (18) holds also for $S^{k,1}(\hat{Q}, \Delta_{n,\sigma}^2)$.

In [13] we investigated with the aid of [15] the approximation properties for an exponential boundary layer function u_b of the above form on a boundary layer mesh $\Delta_{\mathcal{T}_{n,\sigma}}$ where $\mathcal{T}_{n,\sigma}$ is the one dimensional geometric mesh as in Definition 2.3. If the grading factor σ and the number n of layers is such that $\sigma^n \leq Cd$ for some $C > 0$ then

$$\inf_{v \in S^{k,1}(\hat{Q}, \Delta_{\mathcal{T}_{n,\sigma}})} \left(\|u_b - v\|_{0,\hat{Q}} + d \|u_b - v\|_{1,\hat{Q}} \right) \leq K \exp(-bk) \quad (19)$$

for K and b independent of k and d . Since the mesh $\Delta_{\mathcal{T}_{n,\sigma}}$ is also contained in $\Delta_{n,\sigma}^2$, (19) remains valid for $S^{k,1}(\hat{Q}, \Delta_{n,\sigma}^2)$. From an approximation point of view, the minimal mesh that resolves boundary layers robustly as in (19) is the two-element mesh of [15] where the smaller element near the boundary has width $O(kd)$. From (18) and (19) we conclude with the triangle inequality that the spaces $S^{k,1}(\hat{Q}, \Delta_{n,\sigma}^2)$ can approximate functions u of the form (16) at an exponential rate.

Proposition 3.6 *Let u be of the specific form (16). Let the polynomial degree k be related linearly to the number n of layers and let n be such that $\sigma^n \leq Cd$ for some $C > 0$. Then*

$$\inf_{v \in S^{k,1}(\hat{Q}, \Delta_{n,\sigma}^2)} \left(\|u - v\|_{0,\hat{Q}} + d \|u - v\|_{1,\hat{Q}} \right) \leq K \exp(-bN^{\frac{1}{3}}) \quad (20)$$

where $K, b > 0$ are independent of $N = \dim(S^{k,1}(\hat{Q}, \Delta_{n,\sigma}^2))$ and d .

Remark 3.7 We point out that the a-priori estimates (8), (9) are not uniform in $\nu > 0$. Nevertheless, the dependence on ν is algebraic, so that the convergence estimate (20) indicates that the ν -dependence in (8) and (9) can be compensated at a modest number of degrees of freedom in the hp -FEM, at least for laminar flows.

4 Proof of the stability result

This section is devoted to the proof of Theorem 3.1. The proof will proceed in analogy to the definition of geometric boundary layer meshes. First we present local stability results, then we give in Section 4.2 a general stability result for some low order elements on the irregular reference mesh $\Delta_{n,\sigma}$ which is of independent interest. These results are finally “glued” together with the aid of a macro-element technique presented in Section 4.3 in order to obtain the proof of Theorem 3.1.

4.1 Local stability results

For the stability proof, we recapitulate some results on the stability of spectral elements on the reference square and triangle.

Theorem 4.1 *Let $\hat{K} = \hat{Q}$ and $k \geq 2$. Then there exists a constant $C > 0$ independent of k such that*

$$\inf_{0 \neq p \in M_N} \sup_{0 \neq \vec{v} \in \vec{V}_N} \frac{(\nabla \cdot \vec{v}, p)_{\hat{Q}}}{|\vec{v}|_{1,\hat{Q}} \|p\|_{0,\hat{Q}}} \geq Ck^{-\frac{1}{2}} \quad (21)$$

where $\vec{V}_N = \mathcal{Q}_k(\hat{Q})^2 \cap H_0^1(\hat{Q})^2$, $M_N = \mathcal{Q}_{k-2}(\hat{Q}) \cap L_0^2(\hat{Q})$.
If $\hat{K} = \hat{T}$ and $k \geq 2$ then there holds

$$\inf_{0 \neq p \in M_N} \sup_{0 \neq \vec{v} \in \vec{V}_N} \frac{(\nabla \cdot \vec{v}, p)_{\hat{T}}}{|\vec{v}|_{1,\hat{T}} \|p\|_{0,\hat{T}}} \geq Ck^{-3} \quad (22)$$

with C independent of k , $\vec{V}_N = \mathcal{P}_k(\hat{T})^2 \cap H_0^1(\hat{T})^2$ and $M_N = \mathcal{P}_{k-2}(\hat{T}) \cap L_0^2(\hat{T})$.

(21) is proved in [19] and (22) in [16].

Remark 4.2 While (21) is known to be optimal, (22) is likely suboptimal.

Remark 4.3 As in [16], Theorem 4.1 and the macro-element technique ahead (cf. Proposition 4.11) imply immediately Theorem 3.1 on κ -uniform regular meshes of affine elements.

Divergence stability on boundary layer patches (as shown in Figure 2.2) is established in [13]:

Theorem 4.4 *Let $\mathcal{T} = \Delta_{\mathcal{T}_x}$ be a boundary layer mesh as in Definition 2.2. Then there exists a constant $C > 0$ independent of \mathcal{T}_x and $k \geq 2$ such that the spaces*

$$\vec{V}_N = S_0^{k,1}(\Omega, \Delta_{\mathcal{T}_x})^2, \quad M_N = S_0^{k-2,0}(\Omega, \Delta_{\mathcal{T}_x})$$

satisfy the inf-sup condition (7) with $\gamma(N) \geq Ck^{-\frac{1}{2}}$.

This is proved in [13].

4.2 Stability of some low order elements on geometric meshes with hanging nodes

In this subsection we establish divergence stability of low order elements on the irregular geometric meshes $\Delta_{n,\sigma}$.

4.2.1 A Clément type interpolant on $\Delta_{n,\sigma}$

We first present a result which is of independent interest, namely a Clément type interpolant $I : H_0^1(\hat{Q}) \rightarrow S_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$ on geometric meshes with hanging nodes. We remark that such irregular meshes are frequently generated by adaptive FE codes and our interpolant I allows to derive residual a-posteriori error estimates along the lines of [24]. This will be elaborated elsewhere. The degrees of freedom of the FE-space $S_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$ are given by the nodes $\{N_i\}_{i=1}^M$ shown in Figure 4.9. Let $\{\varphi_i\}_{i=1}^M$ be the usual Lagrange basis functions for these nodes, i.e. $\varphi_i \in S_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$, $|\varphi_i| \leq 1$ and $\varphi_i(N_j) = \delta_{ij}$. The support of φ_i consists of the layers i and $i + 1$ (cf. Figure 4.9). We define an interpolant Iu by

$$I : H_0^1(\hat{Q}) \rightarrow S_0^{1,1}(\hat{Q}, \Delta_{n,\sigma}), \quad Iu = \sum_{i=1}^M \alpha_i \varphi_i$$

where

$$\alpha_i = \frac{\int_{\text{supp}(\varphi_i)} u dx}{\text{area}(\text{supp}(\varphi_i))}.$$

The next proposition states that I is essentially an interpolant of Clément type. Let

$$\mathcal{E}(\Delta_{n,\sigma}) = \{e : e \text{ edge of } K, K \in \Delta_{n,\sigma}\}$$

be the set of all edges of elements in $\Delta_{n,\sigma}$. The length of the edge e is denoted by h_e .

Proposition 4.5 *There exists a constant $C > 0$ just depending on the grading factor σ such that*

$$\sum_{K \in \Delta_{n,\sigma}} \frac{1}{h_K^2} \|u - Iu\|_{0,K}^2 + \sum_{K \in \Delta_{n,\sigma}} |u - Iu|_{1,K}^2 + \sum_{e \in \mathcal{E}(\Delta_{n,\sigma})} h_e^{-1} \|u - Iu\|_{0,e}^2 \leq C |u|_{1,\hat{Q}}^2.$$

In particular, $\|Iu\|_{1,\hat{Q}}^2 \leq C |u|_{1,\hat{Q}}^2$.

Define

$$\Omega_i = \text{supp}(\varphi_i), \quad d_i = \text{diam}(\text{supp}(\varphi_i)).$$

Ω_i is affine equivalent to a reference support $\hat{\Omega}$ which is either an L-shaped patch as in Figure 4.9 or a square. As usual, the following scaling property holds

$$|\hat{f}|_{k,\hat{\Omega}} \sim d_i^{k-1} |f|_{k,\Omega_i}, \quad k = 0, 1. \quad (23)$$

Here, we use $f \mapsto \hat{f}$ for the pullback operators which are defined on functions via composition with the affine mappings $\hat{\Omega} \rightarrow \Omega_i$. Now, write $u_i = u|_{\Omega_i}$ and fix an element $K \in \Delta_{n,\sigma}$. Let

$$J_K = \{i : K \subseteq \Omega_i\}.$$

Clearly, the cardinality of J_K is bounded by a constant C independently of K . Further, there exist constants C_1 and C_2 just depending on σ such that

$$C_2 \leq \frac{d_i}{h_K} \leq C_1 \quad \forall i \in J_K. \quad (24)$$

Now, since $|\varphi_i| \leq 1$ and $|J_K| \leq C$

$$\begin{aligned} \frac{1}{h_K^2} \|u - Iu\|_{0,K}^2 &= \frac{1}{h_K^2} \left\| u - \sum_{i \in J_K} u_i \varphi_i + \sum_{i \in J_K} u_i \varphi_i - \sum_{i \in J_K} \alpha_i \varphi_i \right\|_{0,K}^2 \\ &\leq \frac{C}{h_K^2} \sum_{i \in J_K} \left(\|u_i\|_{0,\Omega_i}^2 + \|u_i - \alpha_i\|_{0,\Omega_i}^2 \right). \end{aligned}$$

Scaling and applying (24) yields

$$\begin{aligned} \frac{1}{h_K^2} \|u - Iu\|_{0,K}^2 &\leq C \sum_{i \in J_K} \left(\frac{d_i^2}{h_K^2} \|\hat{u}_i\|_{0,\hat{\Omega}}^2 + \frac{d_i^2}{h_K^2} \|\hat{u}_i - \hat{\alpha}_i\|_{0,\hat{\Omega}}^2 \right) \\ &\leq C \sum_{i \in J_K} \|\hat{u}_i\|_{1,\hat{\Omega}}^2 + \|\hat{u}_i - \hat{\alpha}_i\|_{0,\hat{\Omega}}^2 \end{aligned}$$

where

$$\hat{\alpha}_i = \frac{\int_{\hat{\Omega}} \hat{u}_i dx}{\int_{\hat{\Omega}} dx} (= \alpha_i).$$

With the aid of the first and second Poincaré inequality we get

$$\frac{1}{h_K^2} \|u - Iu\|_{0,K}^2 \leq C \sum_{i \in J_K} |\hat{u}_i|_{1,\hat{\Omega}}^2.$$

The right hand side is scaled back to Ω_i which gives the desired result:

$$\frac{1}{h_K^2} \|u - Iu\|_{0,K}^2 \leq C \sum_{i \in J_K} |u_i|_{1,\Omega_i}^2. \quad (25)$$

Further,

$$\begin{aligned} |u - Iu|_{1,K}^2 &= \left| u - \sum_{i \in J_K} u_i \varphi_i + \sum_{i \in J_K} u_i \varphi_i - \sum_{i \in J_K} \alpha_i \varphi_i \right|_{1,K}^2 \\ &\leq C \left\{ |u|_{1,K}^2 + \sum_{i \in J_K} |u_i \varphi_i|_{1,\Omega_i}^2 + \sum_{i \in J_K} |u_i \varphi_i - \alpha_i \varphi_i|_{1,\Omega_i}^2 \right\}. \end{aligned}$$

We have

$$\begin{aligned} |u_i \varphi_i|_{1,\Omega_i}^2 &\leq C |\hat{u}_i \hat{\varphi}_i|_{1,\hat{\Omega}}^2 \\ &\leq C \|(\nabla \hat{u}_i) \hat{\varphi}_i\|_{0,\hat{\Omega}}^2 + C \|\hat{u}_i (\nabla \hat{\varphi}_i)\|_{0,\hat{\Omega}}^2 \\ &\leq C \|\hat{u}_i\|_{1,\hat{\Omega}}^2 \leq C |u_i|_{1,\Omega_i}^2 \end{aligned}$$

and

$$\begin{aligned} |u_i \varphi_i - \alpha_i \varphi_i|_{1,\Omega_i}^2 &\leq C \|(\nabla \hat{\varphi}_i)(\hat{u}_i - \hat{\alpha}_i)\|_{0,\hat{\Omega}}^2 + C \|(\nabla \hat{u}_i - \nabla \hat{\alpha}_i) \hat{\varphi}_i\|_{0,\hat{\Omega}}^2 \\ &\leq C \|\hat{u}_i - \hat{\alpha}_i\|_{0,\hat{\Omega}}^2 + C \|\nabla \hat{u}_i\|_{0,\hat{\Omega}}^2 \\ &\leq C |\hat{u}_i|_{1,\hat{\Omega}}^2 \leq C |u_i|_{1,\Omega_i}^2 \end{aligned}$$

where we used again scaling and the inequalities of Poincaré. Together we get

$$|u - Iu|_{1,K}^2 \leq C \sum_{i \in J_K} |u_i|_{1,\Omega_i}^2. \quad (26)$$

Let now e be an edge of the element K and \hat{e} the corresponding edge in the reference element \hat{K} . We use now the notation $f \mapsto \hat{f}$ for the pullback operator induced by the affine equivalence of K and \hat{K} . We get with the trace theorem

$$\begin{aligned} \frac{1}{h_e} \|u - Iu\|_{0,e}^2 &\leq C \|\hat{u} - \hat{Iu}\|_{0,\hat{e}}^2 \leq C \|\hat{u} - \hat{Iu}\|_{1,\hat{K}}^2 \\ &\leq \frac{C}{h_K^2} \|u - Iu\|_{0,K}^2 + C |u - Iu|_{1,K}^2. \end{aligned}$$

Referring to (25) and (26) gives

$$\frac{1}{h_e} \|u - Iu\|_{0,e}^2 \leq C \sum_{i \in J_K} |u_i|_{1,\Omega_i}^2. \quad (27)$$

Combining (25), (26) and (27) is the assertion (since $|J_K| \leq C$).

Remark 4.6 An analogous interpolant can be constructed for the geometric mesh $\Delta_{n,\sigma}$ on the triangle \hat{T} .

4.2.2 The space $\mathcal{L}^1(K)$

In this subsection we introduce a low order velocity space which is also used e.g. in [7]. To define this space, consider a parallelogram K with vertices $a_1, a_2, a_3, a_4 = a_0$. We denote by f_i the edge $[a_{i-1}, a_i]$ and by \vec{n}_i its unit outward normal as shown in Figure 4.10. K is affine equivalent to the reference unit square \hat{Q} in the (\hat{x}_1, \hat{x}_2) reference space. The vertices, edges and normals of \hat{Q} are denoted by \hat{f}_i, \hat{a}_i and $\widehat{\vec{n}}_i$, respectively. We introduce the reference variables

$$\hat{x}_1, \quad \hat{x}_2, \quad \hat{x}_3 := 1 - \hat{x}_2, \quad \hat{x}_4 := 1 - \hat{x}_1$$

and set

$$\hat{q}_1 := \hat{x}_2 \hat{x}_3 \hat{x}_4, \quad \hat{q}_2 := \hat{x}_1 \hat{x}_3 \hat{x}_4, \quad \hat{q}_3 := \hat{x}_1 \hat{x}_2 \hat{x}_4, \quad \hat{q}_4 := \hat{x}_1 \hat{x}_2 \hat{x}_3.$$

For example, the polynomial \hat{q}_1 vanishes on the sides \hat{f}_2, \hat{f}_3 and \hat{f}_4 . Finally, we let

$$\vec{p}_i := \vec{n}_i \left(\hat{q}_i \circ F_K^{-1} \right) \quad i = 1, \dots, 4.$$

The velocity space $\mathcal{L}^1(K)$ is then defined as

$$\mathcal{L}^1(K) := \mathcal{Q}_1(K)^2 \oplus \text{span}(\vec{p}_1, \vec{p}_2, \vec{p}_3, \vec{p}_4).$$

$\mathcal{L}^1(K)$ is of dimension 12 and $\mathcal{Q}_1(K)^2 \subset \mathcal{L}^1(K) \subset \mathcal{Q}_2(K)^2$ with strict inclusion.

Lemma 4.7 *A polynomial $\vec{p} \in \mathcal{L}^1(K)$ is uniquely determined by the 12 quantities:*

$$\begin{aligned} \vec{p}(a_i) & \quad i = 1, \dots, 4, \\ \int_{f_i} \vec{p} \cdot \vec{n}_i ds & \quad i = 1, \dots, 4. \end{aligned}$$

Furthermore the restriction of \vec{p} to any side f_i of K depends only upon the degrees of freedom defined on that side.

This is proved in [7, Section II.3.1].

Remark 4.8 If K is a triangle we may define a space $\mathcal{K}^1(K)$ with $\mathcal{P}_1(K)^2 \subset \mathcal{K}^1(K) \subset \mathcal{P}_2(K)^2$ in complete analogy to the definition of $\mathcal{L}^1(K)$. For details, see [7, Section II.2.1].

For an affine mesh \mathcal{T} on Ω consisting of quadrilaterals the space $\mathcal{L}^{1,1}(\Omega, \mathcal{T})$ is

$$\mathcal{L}^{1,1}(\Omega, \mathcal{T}) := \left\{ \vec{u} \in H^1(\Omega)^2 : \vec{u}|_K \in \mathcal{L}^1(K) \quad \forall K \in \mathcal{T} \right\} \quad (28)$$

and

$$\mathcal{L}_0^{1,1}(\Omega, \mathcal{T}) := \mathcal{L}^{1,1}(\Omega, \mathcal{T}) \cap H_0^1(\Omega)^2.$$

4.2.3 Divergence stability of $\mathcal{L}_0^{1,1} \times S_0^{0,0}$ on $\Delta_{n,\sigma}$

We are now able to show the inf-sup condition for $\mathcal{L}_0^{1,1} \times S_0^{0,0}$ elements on the irregular geometric mesh $\Delta_{n,\sigma}$. To do so, we apply the technique of overlapping macro-patches of [18].

Theorem 4.9 *The spaces $\mathcal{L}_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$ and $S_0^{0,0}(\hat{Q}, \Delta_{n,\sigma})$ are divergence stable, that is the inf-sup condition (7) holds with a constant just depending on the grading factor σ .*

We introduce the patches $\{M_j\}_{j=1}^M$ using the numbering in (11):

$$\begin{aligned} M_1 &= \Omega_{11} \cup \Omega_{22} \cup \Omega_{12} \cup \Omega_{32}, \\ M_j &= \cup \{\Omega_{ik} : 1 \leq i \leq 3, j \leq k \leq j+1\} \quad 2 \leq j \leq n. \end{aligned}$$

M_1 is built of the four elements near the origin whereas M_j for $j \geq 2$ consists of the elements in the layers j and $j+1$. As in (14) and (28) we let

$$\begin{aligned} S^{0,0}(M_j) &= \{p \in L^2(M_j) : p|_K \in \mathcal{Q}_0(K), K \subset M_j\}, \\ \mathcal{L}_0^{1,1}(M_j) &= \{\vec{v} \in H_0^1(M_j)^2 : \vec{v}|_K \in \mathcal{L}^1(K), K \subset M_j\} \end{aligned}$$

and

$$N_{M_j} = \{p \in S^{0,0}(M_j) : (\nabla \cdot \vec{v}, p)_{M_j} = 0 \forall \vec{v} \in \mathcal{L}_0^{1,1}(M_j)\}.$$

The degrees of freedom of $\mathcal{L}_0^{1,1}(M_j)$ are shown on Figure 4.11. The circles indicate the values of $\vec{v} \cdot \vec{n}$ and the crosses the nodal values (cf. Lemma 4.7). Now, it holds

$$N_{M_j} = \{p = \text{const on } M_j\}, \quad (29)$$

since by our choice of the velocity spaces a pressure in N_{M_j} is not allowed to have jumps over the interelement edges. We can split $S^{0,0}(M_j)$ orthogonally in $L^2(M_j)$ into

$$S^{0,0}(M_j) = N_{M_j} \oplus W_{M_j}. \quad (30)$$

Let

$$\mathcal{E}(M_j) = \{e : e \text{ edge of an element } K \subset M_j, e \not\subset \partial M_j\}$$

denote the set of all interelement edges in the patch M_j . Extra care must be taken due to the presence of hanging nodes. Therefore, we define

$$\mathcal{E}_0(M_j) = \{e \in \mathcal{E}(M_j) : e \text{ has no hanging node in the mid-point}\}.$$

Globally, $\mathcal{E}(\Delta_{n,\sigma})$ and $\mathcal{E}_0(\Delta_{n,\sigma})$ are defined completely analogous. Recall that the length of an edge e is h_e . We denote by $[f]_e$ the jump of a piecewise continuous function f across the edge e of an element K :

$$[f]_e(x) = \lim_{t \rightarrow 0^+} f(x + t\vec{n}_e) - \lim_{t \rightarrow 0^+} f(x - t\vec{n}_e) \quad x \in e,$$

where \vec{n}_e is the unit outward normal to the element K . On each patch M_j we introduce a mesh-dependent seminorm

$$|p|_{M_j}^2 = \sum_{K \subset M_j} h_K^2 \|\nabla p\|_{0,K}^2 + \sum_{e \in \mathcal{E}_0(M_j)} h_e \int_e |[p]_e|^2 ds.$$

For $p \in S^{0,0}(M_j)$ only the jump terms contribute to this seminorm. Globally, we define analogously

$$|p|_{h,\hat{Q}}^2 = \sum_{K \in \Delta_{n,\sigma}} h_K^2 \|\nabla p\|_{0,K}^2 + \sum_{e \in \mathcal{E}_0(\Delta_{n,\sigma})} h_e \int_e |[p]_e|^2 ds.$$

Hence, a scaling argument gives the local stability condition

$$\sup_{0 \neq \vec{v} \in \mathcal{L}_0^{1,1}(M_j)} \frac{(\nabla \cdot \vec{v}, p)_{M_j}}{|\vec{v}|_{1,M_j} |p|_{M_j}} \geq \gamma > 0 \quad \forall p \in W_{M_j} \setminus \{0\} \quad (31)$$

where γ is independent of j (and thus of the meshwidth h) but depends on the grading factor σ .

Now, let $0 \neq p \in S_0^{0,0}(\hat{Q}, \Delta_{n,\sigma})$. We write $p_j := p|_{M_j}$. According to (29) and (30) we decompose p_j into

$$p_j = c_j + q_j$$

where $c_j \in N_{M_j}$ is constant on M_j and $q_j \in W_{M_j}$. (31) implies that for each q_j there exists a velocity $\vec{v}_j \in \mathcal{L}_0^{1,1}(M_j)$ (choose $\vec{v}_j = 0$ if $q_j = 0$) such that

$$(\nabla \cdot \vec{v}_j, q_j)_{M_j} \geq \gamma |q_j|_{M_j}^2, \quad |\vec{v}_j|_{1,M_j} \leq |q_j|_{M_j},$$

and therefore also

$$(\nabla \cdot \vec{v}_j, p_j)_{M_j} \geq \gamma |p_j|_{M_j}^2, \quad |\vec{v}_j|_{1,M_j} \leq |p_j|_{M_j}.$$

We set now $\vec{v} := \sum_{j=1}^M \vec{v}_j$ and have $\vec{v} \in \mathcal{L}_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$. Then

$$(\nabla \cdot \vec{v}, p)_{\hat{Q}} \geq \gamma \sum_{j=1}^M |p_j|_{M_j}^2 \geq C |p|_{h,\hat{Q}}^2 \quad (32)$$

and

$$|\vec{v}|_{1,\hat{Q}}^2 \leq \sum_{j=1}^M |\vec{v}_j|_{1,M_j}^2 \leq C |p|_{h,\hat{Q}}^2. \quad (33)$$

(32) and (33) imply

$$\sup_{0 \neq \vec{v} \in \mathcal{L}_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})} \frac{(\nabla \cdot \vec{v}, p)_{\hat{Q}}}{|\vec{v}|_{1,\hat{Q}}} \geq C_1 |p|_{h,\hat{Q}} = C_1 \|p\|_{0,\hat{Q}} \frac{|p|_{h,\hat{Q}}}{\|p\|_{0,\hat{Q}}}. \quad (34)$$

Following still [18], we show that in (34) the semi-norm can be replaced by the full L^2 -norm. By the continuous inf-sup condition (6) there is a velocity $\vec{v} \in H_0^1(\hat{Q})^2$ such that

$$(\nabla \cdot \vec{v}, p)_{\hat{Q}} \geq C \|p\|_{0,\hat{Q}}^2, \quad |\vec{v}|_{1,\hat{Q}} \leq \|p\|_{0,\hat{Q}}.$$

Let $\vec{v}_h = \vec{I}\vec{v} := (Iv_1, Iv_2) \in S_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})^2$ where I is the Clément type interpolant of Proposition 4.5. We integrate by parts, apply Cauchy-Schwarz and Proposition 4.5 to get

$$(\nabla \cdot \vec{v}_h, p)_{\hat{Q}} = (\nabla \cdot (\vec{v}_h - \vec{v}), p)_{\hat{Q}} + (\nabla \cdot \vec{v}, p)_{\hat{Q}}$$

$$\begin{aligned}
&= \sum_{K \in \Delta_{n,\sigma}} \int_K (\vec{v} - \vec{v}_h) \cdot \nabla p + \sum_{e \in \mathcal{E}_0(\Delta_{n,\sigma})} \int_e ((\vec{v}_h - \vec{v}) \cdot \vec{n}) [p]_e ds + C \|p\|_{0,\hat{Q}}^2 \\
&\geq - \left\{ \sum_{K \in \Delta_{n,\sigma}} h_K^{-2} \|\vec{v}_h - \vec{v}\|_{0,K}^2 + \sum_{e \in \mathcal{E}(\Delta_{n,\sigma})} h_e^{-1} \|\vec{v}_h - \vec{v}\|_{0,e}^2 \right\}^{\frac{1}{2}} |p|_{h,\hat{Q}} + C \|p\|_{0,\hat{Q}}^2 \\
&\geq -C_2 |\vec{v}|_{1,\hat{Q}} |p|_{h,\hat{Q}} + C_3 \|p\|_{0,\hat{Q}}^2 \\
&\geq \|p\|_{0,\hat{Q}}^2 \left(C_3 - C_2 \frac{|p|_{h,\hat{Q}}}{\|p\|_{0,\hat{Q}}} \right).
\end{aligned}$$

Further, $|\vec{v}_h|_{1,\hat{Q}} \leq C \|p\|_{0,\hat{Q}}$, such that we established

$$\sup_{0 \neq \vec{v} \in \mathcal{L}_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})} \frac{(\nabla \cdot \vec{v}, p)_{\hat{Q}}}{|\vec{v}|_{1,\hat{Q}}} \geq \|p\|_{0,\hat{Q}} \left(C_4 - C_5 \frac{|p|_{h,\hat{Q}}}{\|p\|_{0,\hat{Q}}} \right) \quad (35)$$

We write t for the ratio $|p|_{h,\hat{Q}} / \|p\|_{0,\hat{Q}}$ and combine (34) and (35) into

$$\sup_{0 \neq \vec{v} \in \mathcal{L}_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})} \frac{(\nabla \cdot \vec{v}, p)_{\hat{Q}}}{|\vec{v}|_{1,\hat{Q}}} \geq \|p\|_{0,\hat{Q}} \min_{t \geq 0} f(t)$$

with $f(t) = \max(C_4 - C_5 t, C_1 t)$. Since $\min_{t \geq 0} f(t) = \frac{C_1 C_4}{C_1 + C_5}$, the assertion follows.

Remark 4.10 A similar construction yields stability of low order elements for the geometric mesh $\Delta_{n,\sigma}$ on the triangle \hat{T} . This holds for example for $S_0^{2,1} \times S_0^{0,0}$ elements or one could use the velocity space $\mathcal{K}^1(K)$ mentioned in Remark 4.8.

4.3 A macro-element technique

A useful tool in order to prove divergence stability is the macro-element technique introduced for example in [19]. It is stated in a very general form in the next proposition whose proof is given for the sake of completeness.

Proposition 4.11 *Let \mathcal{F} be a family of irregular or regular affine meshes on the reference element \hat{K} . On a bounded polygon $\Omega \subset \mathbb{R}^2$ let \mathcal{T} be an affine mesh which is obtained from a (coarser) affine κ -uniform macro-element mesh \mathcal{T}_m in the following way: Some elements of \mathcal{T}_m are further partitioned into $F_K(\hat{T})$ where $\hat{T} \in \mathcal{F}$ and F_K is the affine mapping between \hat{K} and K . Let \underline{k} be a polynomial degree distribution on \mathcal{T} and $|\underline{k}| := \max\{k_K : K \in \mathcal{T}\}$. Assume that there exists a space $\vec{X}_N \subseteq S_0^{k,1}(\Omega, \mathcal{T})^2 \subset H_0^1(\Omega)^2$ such that*

$$\inf_{0 \neq p \in S_0^{0,0}(\Omega, \mathcal{T}_m)} \sup_{0 \neq \vec{v} \in \vec{X}_N} \frac{(\nabla \cdot \vec{v}, p)_\Omega}{|\vec{v}|_{1,\Omega} \|p\|_{0,\Omega}} \geq C_1 \quad (36)$$

with a constant $C_1 > 0$ independent of \underline{k} . Assume that on the reference element \hat{K} the local stability condition

$$\inf_{0 \neq p \in S_0^{k-2,0}(\hat{K})} \sup_{0 \neq \vec{v} \in S_0^{k,1}(\hat{K})^2} \frac{(\nabla \cdot \vec{v}, p)_\Omega}{|\vec{v}|_{1,\Omega} \|p\|_{0,\Omega}} \geq C_2 k^{-\alpha} \quad \forall k \geq 2 \quad (37)$$

is valid with $C_2 > 0$ and $\alpha > 0$ independent of k . Assume further that the family \mathcal{F} is uniformly stable in the sense that there holds

$$\inf_{0 \neq p \in S_0^{k-2,0}(\hat{K}, \hat{\mathcal{T}})} \sup_{0 \neq \vec{v} \in S_0^{k,1}(\hat{K}, \hat{\mathcal{T}})^2} \frac{(\nabla \cdot \vec{v}, p)_{\hat{K}}}{|\vec{v}|_{1,\hat{K}} \|p\|_{0,\hat{K}}} \geq C_2 |\underline{k}|^{-\alpha} \quad (38)$$

for all $\hat{\mathcal{T}} \in \mathcal{F}$ and all polynomial degree vectors \underline{k} on $\hat{\mathcal{T}}$ that appear in the correspondingly refined macro-elements.

Then there exists a constant $C > 0$ only depending on C_1 , C_2 and κ such that the spaces

$$\vec{V}_N = S_0^{k,1}(\Omega, \mathcal{T})^2, \quad M_N = S_0^{k-2,0}(\Omega, \mathcal{T}) \quad (39)$$

satisfy the inf-sup condition (7) with $\gamma(N) \geq C |k|^{-\alpha}$.

Let $p \in S_0^{k-2,0}(\Omega, \mathcal{T})$. We decompose p into $p = p^* + p_m$ where p_m is the $L^2(\Omega)$ -projection of p onto $S_0^{0,0}(\Omega, \mathcal{T}_m)$, the space of piecewise constant pressures with vanishing mean value on the macro-element mesh \mathcal{T}_m . Because of (36) there exists $\vec{v}_m \in \vec{X}_N \subseteq S_0^{k,1}(\Omega, \mathcal{T})^2$ such that

$$(\nabla \cdot \vec{v}_m, p_m)_\Omega \geq C_1 \|p_m\|_{0,\Omega}^2, \quad |\vec{v}_m|_{1,\Omega} \leq \|p_m\|_{0,\Omega}. \quad (40)$$

Next, consider $p^* \in S_0^{k-2,0}(\Omega, \mathcal{T})$. Therefore, fix a macro-element $K \in \mathcal{T}_m$ and set $p_K^* := p^*|_K$. By construction, $p_K^* \in S_0^{k-2,0}(K, \mathcal{T}_K)$ where \mathcal{T}_K is the restriction of \mathcal{T} to the macro-element K . We transform p_K^* back to the reference element \hat{K} via the affine transformation F_K , that is we put

$$p_{\hat{K}}^* = p_K^* \circ F_K.$$

We have $\mathcal{T}_K = F_K(\hat{\mathcal{T}})$ for some $\hat{\mathcal{T}} \in \mathcal{F}$ if K is further refined or $\mathcal{T}_K = F_K(\hat{\mathcal{T}})$ with $\hat{\mathcal{T}} = \hat{K}$ if K is not locally refined. By (37) or (38) there exists $\vec{v}_{\hat{K}}^* \in S_0^{k,1}(\hat{K}, \hat{\mathcal{T}})^2$ such that

$$\left(\nabla \cdot \vec{v}_{\hat{K}}^*, p_{\hat{K}}^* \right)_{\hat{K}} \geq C_2 |\underline{k}|^{-\alpha} \|p_{\hat{K}}^*\|_{0,\hat{K}}^2, \quad |\vec{v}_{\hat{K}}^*|_{1,\hat{K}} \leq \|p_{\hat{K}}^*\|_{0,\hat{K}}. \quad (41)$$

We can not use the usual pushforward operator to define \vec{v}_K^* on K but rather the *Piola-transform*

$$\vec{v}_K^* = P_K(\vec{v}_{\hat{K}}^*) = |J_K|^{-1} J_K \vec{v}_{\hat{K}}^* \circ F_K^{-1}.$$

Here, J_K is the Jacobian of F_K and $|J_K| = \det(J_K)$. J_K is constant and thus $\vec{v}_K^* \in S_0^{k,1}(K, \mathcal{T}_K)^2$. Moreover, there holds (cf. [5])

$$\left(\nabla \cdot \vec{v}_K^*, p_K^* \right)_{\hat{K}} = (\nabla \cdot \vec{v}_{\hat{K}}^*, p_{\hat{K}}^*)_{\hat{K}}. \quad (42)$$

(42), (41) and scaling give

$$(\nabla \cdot \vec{v}_K^*, p_K^*)_K \geq C_2 |\underline{k}|^{-\alpha} \|p_{\hat{K}}^*\|_{0,\hat{K}}^2 \geq \frac{C}{h_K^2} C_2 |\underline{k}|^{-\alpha} \|p_K^*\|_{0,K}^2. \quad (43)$$

By similar scaling properties for the Piola-transform (cf. [5]) we get

$$|\vec{v}_K^*|_{1,K} \leq C \frac{h_K}{\rho_K^2} |\vec{v}_{\hat{K}}^*|_{1,\hat{K}} \leq C \frac{h_K}{\rho_K^2} \|p_{\hat{K}}^*\|_{0,\hat{K}} \leq C \frac{h_K}{\rho_K^3} \|p_K^*\|_{0,K} \quad (44)$$

where we applied once again (41). (43) and (44) imply the existence of a $S_0^{k,1}(K, \mathcal{T}_K)^2$ -velocity field on K also denoted by \vec{v}_K^* such that

$$(\nabla \cdot \vec{v}_K^*, p_K^*)_K \geq \frac{C}{\kappa^3} C_2 |\underline{k}|^{-\alpha} \|p_K^*\|_{0,K}^2, \quad |\vec{v}_K^*|_{1,K} \leq \|p_K^*\|_{0,K}. \quad (45)$$

We define now $\vec{v}^* = \sum_{K \in \mathcal{T}_m} \vec{v}_K^*$ which belongs to $S_0^{k,1}(\Omega, \mathcal{T})^2 \subset H_0^1(\Omega)^2$. (45) holds independently of K and hence the same estimate is valid for \vec{v}^* ,

$$(\nabla \cdot \vec{v}^*, p^*)_\Omega \geq \underbrace{\frac{C}{\kappa^3} C_2}_{=: C_3} |\underline{k}|^{-\alpha} \|p^*\|_{0,\Omega}^2, \quad |\vec{v}^*|_{1,\Omega} \leq \|p^*\|_{0,\Omega}. \quad (46)$$

Select now $\vec{v} = \vec{v}^* + \delta \vec{v}_m$ where $\delta > 0$ is still at our disposal. Then

$$(\nabla \cdot \vec{v}, p)_\Omega = (\nabla \cdot \vec{v}^*, p^*)_\Omega + \delta (\nabla \cdot \vec{v}_m, p_m)_\Omega + (\nabla \cdot \vec{v}^*, p_m)_\Omega + \delta (\nabla \cdot \vec{v}_m, p^*)_\Omega.$$

Since p_m is piecewise constant on \mathcal{T}_m and \vec{v}^* vanishes on ∂K for all $K \in \mathcal{T}_m$ the third term $(\nabla \cdot \vec{v}^*, p_m)_\Omega$ is zero. With (40) and (46) one has for $\varepsilon > 0$

$$\begin{aligned} (\nabla \cdot \vec{v}, p)_\Omega &\geq C_3 |\underline{k}|^{-\alpha} \|p^*\|_{0,\Omega}^2 + \delta C_1 \|p_m\|_{0,\Omega}^2 - \delta C_4 |\vec{v}_m|_{1,\Omega} \|p^*\|_{0,\Omega} \\ &\geq C_3 |\underline{k}|^{-\alpha} \|p^*\|_{0,\Omega}^2 + \delta C_1 \|p_m\|_{0,\Omega}^2 - \delta C_4 \|p_m\|_{0,\Omega} \|p^*\|_{0,\Omega} \\ &\geq C_3 |\underline{k}|^{-\alpha} \|p^*\|_{0,\Omega}^2 + \delta C_1 \|p_m\|_{0,\Omega}^2 - \frac{\delta C_4}{4\varepsilon} \|p^*\|_{0,\Omega}^2 - \delta \varepsilon C_4 \|p_m\|_{0,\Omega}^2 \\ &= \left(C_3 |\underline{k}|^{-\alpha} - \frac{\delta C_4}{4\varepsilon} \right) \|p^*\|_{0,\Omega}^2 + \delta (C_1 - C_4 \varepsilon) \|p_m\|_{0,\Omega}^2. \end{aligned}$$

Choosing $\varepsilon = \frac{C_1}{2C_4}$ and $\delta = \frac{2\varepsilon C_3 |\underline{k}|^{-\alpha}}{C_4}$ yields

$$(\nabla \cdot \vec{v}, p)_\Omega \geq \frac{C_3}{2} |\underline{k}|^{-\alpha} \|p^*\|_{0,\Omega}^2 + C_5 |\underline{k}|^{-\alpha} \|p_m\|_{0,\Omega}^2 \geq C_6 |\underline{k}|^{-\alpha} \|p\|_{0,\Omega}^2. \quad (47)$$

From (46) and (40) follows also

$$|\vec{v}|_{1,\Omega} \leq |\vec{v}^*|_{1,\Omega} + \delta |\vec{v}_m|_{1,\Omega} \leq \|p^*\|_{0,\Omega} + C |\underline{k}|^{-\alpha} \|p_m\|_{0,\Omega} \leq C_7 \|p\|_{0,\Omega} \quad (48)$$

with C_7 independent of \underline{k} . (47) and (48) imply (39) which finishes the proof of Proposition 4.11.

4.4 Proof of the main result

Applying the macro-element technique in Proposition 4.11 gives immediately the following corollaries used in the proof of Theorem 3.1.

Corollary 4.12 *Let $\Delta_{n,\sigma}$ be the geometric mesh on \hat{Q} (cf. Definition 2.1). Let \underline{k} be a polynomial degree vector as in (12) and let $|\underline{k}| = \max \{k_K : K \in \Delta_{n,\sigma}\}$. Then there exists a constant $C > 0$ independent of n and \underline{k} but depending on σ such that the pairs*

$$\vec{V}_N = S_0^{k,1}(\hat{Q}, \Delta_{n,\sigma})^2, \quad M_N = S_0^{k-2,0}(\hat{Q}, \Delta_{n,\sigma})$$

fulfill the inf-sup condition (7) with $\gamma(N) \geq C |\underline{k}|^{-\frac{1}{2}}$.

We apply Proposition 4.11 with

$$\mathcal{F} = \emptyset, \quad \mathcal{T}_m = \Delta_{n,\sigma}$$

and $\kappa = \kappa(\sigma)$ is the uniformity constant of the mesh $\Delta_{n,\sigma}$ (which depends only on σ). Setting $\vec{X}_N = \mathcal{L}_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$, condition (36) is satisfied due to Theorem 4.9 with $C_1 = C_1(\sigma)$ independent of \underline{k} . (37) holds because of Theorem 4.1 with $\alpha = 1/2$. The assertion follows now from Proposition 4.11.

Corollary 4.13 *Let $\Delta_{n,\sigma}^2$ be the geometric tensor product mesh on \hat{Q} (cf. Definition 2.3) with underlying geometric mesh $\Delta_{n,\sigma}$. Let \underline{k} be a polynomial distribution on $\Delta_{n,\sigma}^2$ which is constant on each element $K' \in \Delta_{n,\sigma}$. Let $|\underline{k}| = \max \{k_K : K \in \Delta_{n,\sigma}^2\}$. Then there exists a constant $C > 0$ independent of n and \underline{k} but depending on σ such that the spaces*

$$\vec{V}_N = S_0^{k,1}(\hat{Q}, \Delta_{n,\sigma}^2)^2, \quad M_N = S_0^{k-2,0}(\hat{Q}, \Delta_{n,\sigma}^2)$$

satisfy the inf-sup condition (7) with $\gamma(N) \geq C |\underline{k}|^{-\frac{1}{2}}$.

As in Corollary 4.12 above, we apply Proposition 4.11 with

$$\mathcal{F} = \{\Delta_{\mathcal{T}_x} : \mathcal{T}_x \text{ arbitrary}\}, \quad \mathcal{T}_m = \Delta_{n,\sigma}$$

and $\kappa = \kappa(\sigma)$ is the uniformity constant of the mesh $\Delta_{n,\sigma}$ (which depends only on σ). Setting $\vec{X}_N = \mathcal{L}_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$, condition (36) is satisfied due to Theorem 4.9 with $C_1 = C_1(\sigma)$ independent of \underline{k} . (37) follows from Theorem 4.1 and (38) from Theorem 4.4 with $\alpha = 1/2$ (since the constant in Theorem 4.4 does not depend on the one dimensional mesh \mathcal{T}_x). Thus Proposition 4.11 can be applied and Corollary 4.13 follows.

Remark 4.14 Corollaries 4.12 and 4.13 hold also for the meshes $\Delta_{n,\sigma}$ and $\Delta_{n,\sigma}^2$ on the reference triangle \hat{T} with inf-sup constant $\gamma(N) \geq C |\underline{k}|^{-3}$. Divergence stability for the mixed meshes mentioned in Remark 2.4 is obtained in the same way using Proposition 4.11, Theorem 4.1 and Theorem 4.4. The inf-sup condition holds with $C |\underline{k}|^{-\alpha}$ where $\alpha = 1/2$ if the mesh contains no triangles and $\alpha = 3$ otherwise.

Proof of Theorem 3.1: The proof of Theorem 3.1 is now easy. We put $\vec{X}_N = S_0^{2,1}(\Omega, \mathcal{T}_m)^2$. By standard theory (see, e.g., [7, 5]), (36) in Proposition 4.11 is satisfied. Due to Theorem 4.1, Theorem 4.4, Corollary 4.12, Corollary 4.13 and Remark 4.14, we see that (37) and (38) in Proposition 4.11 are valid with $\alpha = 1/2$ if the mesh does not contain triangles and with $\alpha = 3$ otherwise. Proposition 4.11 therefore gives the assertion of the theorem.

References

- [1] I. Babuška and B.Q. Guo: *Regularity of the solution of elliptic problems with piecewise analytic data I,II*, SIAM J. Math. Anal. **19** (1988), 172-203, and **20** (1989), 763-781.
- [2] R. Becker: *An adaptive FEM for the incompressible Navier-Stokes Equations on Time-dependent domains*, Preprint 95-44, IWR, Univ. Heidelberg 1995.

- [3] R. Becker and R. Rannacher: *Finite element solution of the incompressible Navier-Stokes equations on anisotropically refined meshes*, Proc. of the 10th GAMM Seminar, Notes on Num. Fluid Dyn., Vieweg Publ. Braunschweig, Germany (1995).
- [4] C. Bernardi and Y. Maday: *Approximations spectrales de problèmes aux limites elliptiques*, Masson Springer Publishers, Paris-New York 1992.
- [5] F. Brezzi and M. Fortin: *Mixed and Hybrid Finite Element Methods*, Springer Verlag, New York 1991.
- [6] P.G. Ciarlet: *The finite element method for elliptic problems*, North Holland Publishers 1978.
- [7] V. Girault and P.A. Raviart: *Finite Element Methods for Navier Stokes Equations*, Springer Verlag Heidelberg, New York 1986.
- [8] B.Q. Guo and I. Babuška: *The hp-version of the finite element method I: The basic approximation results; and part II: General results and applications*, Comp. Mech. **1** (1986), 21-41 and 203-226.
- [9] B.Q. Guo and I. Babuška: *On the regularity of Elasticity problems with piecewise analytic data*, Adv. Appl. Math. **14** (1993), 307-347.
- [10] J.L. Lions and E. Magenes: *Non-homogeneous boundary value problems and applications*, vol. 1, Springer Verlag, New York 1972.
- [11] W. Rachowicz: *An anisotropic h-type mesh-refinement strategy*, Computer Methods in Applied Mechanics and Engineering **109** (1993), 169-181.
- [12] D. Schötzau: *Doctoral Dissertation*, in preparation.
- [13] D. Schötzau and C. Schwab: *Mixed hp-FEM on anisotropic meshes*, Seminar für Angewandte Mathematik, Research Report 97-02, ETH Zürich 1997, to appear in Math. Models & Methods in Applied Sciences, **5 (no. 8)** (1998).
- [14] C. Schwab: *Lecture Notes on hp- and spectral FEM*, ETH Zürich 1997, to appear.
- [15] C. Schwab and M. Suri: *The p and hp versions of the finite element method for problems with boundary layers*, Math. Comp. **65** (1996), 1403-1429.
- [16] C. Schwab and M. Suri: *Mixed hp-FEM for incompressible fluid flow*, Preprint 1997.
- [17] C. Schwab, M. Suri and C.A. Xenophontos: *The hp-version of the FEM for problems in Mechanics with boundary layers*, Seminar für Angewandte Mathematik, Research Report 96-20, ETH Zürich 1996.
- [18] R. Stenberg: *Error analysis of some Finite Element Methods for the Stokes problem*, Math. Comp. **54** (1990), 495-508.
- [19] R. Stenberg and M. Suri: *Mixed hp Finite Element Methods for problems in elasticity and Stokes flow*, Num. Math. **72** (1996), 367-389.
- [20] M. Suri: *A Reduced Constraint hp Finite Element Method for Shell Problems*, Math. Comp. **66** (1997), 15-29.
- [21] R. Temam and X. Wang: *Asymptotic analysis of the linearized Navier-Stokes equations in a channel*, Differential and Integral Equations **8 (no. 7)** (1995), 1591-1618.

- [22] R. Temam and X. Wang: *Asymptotic analysis of Oseen type equations in a channel at small viscosity*, Indiana University Mathematics Journal **45 (no. 3)** (1996), 863-916.
- [23] H. Triebel: *Interpolation Theory, Function Spaces, Differential Operators*, 2nd Ed., J.A. Barth Publ., Heidelberg-Leipzig 1995.
- [24] R. Verfürth: *A review of a posteriori error estimation and adaptive mesh-refinement techniques*, Wiley-Teubner, Chichester-Stuttgart 1996.

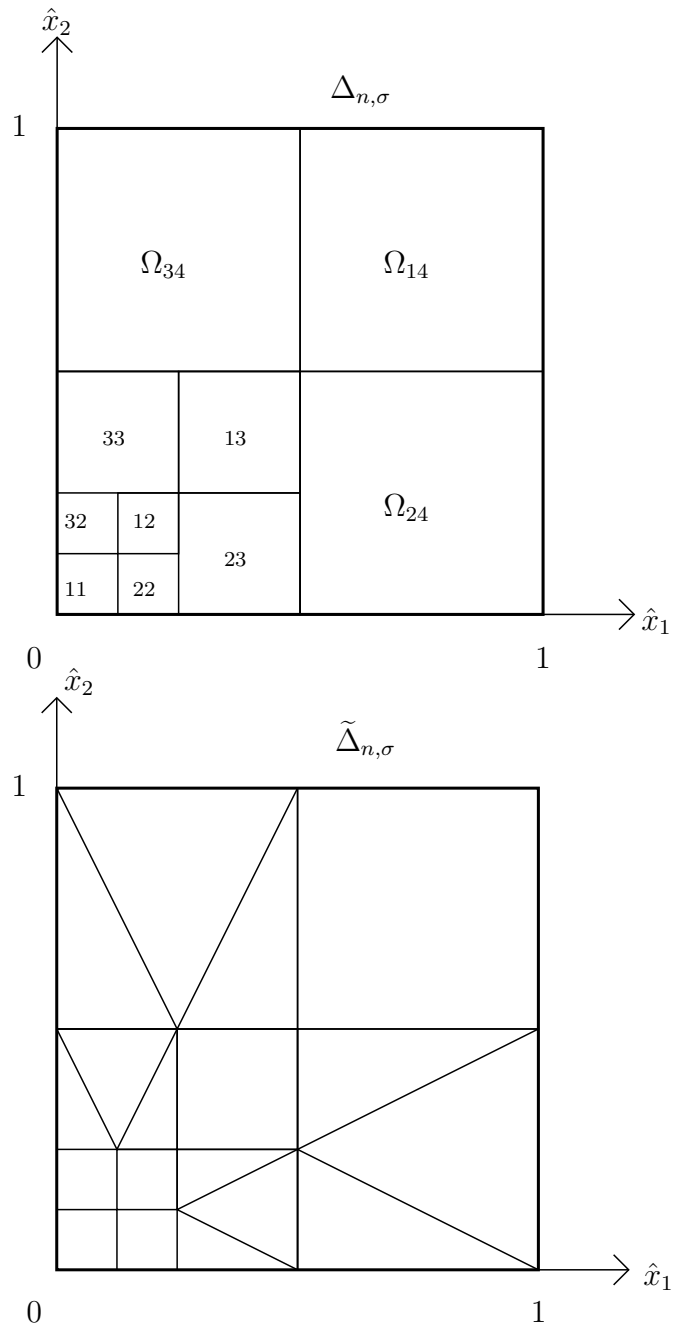


Figure 2.1: The geometric meshes $\Delta_{n,\sigma}$ and $\tilde{\Delta}_{n,\sigma}$ with $n = 3$ and $\sigma = 0.5$.

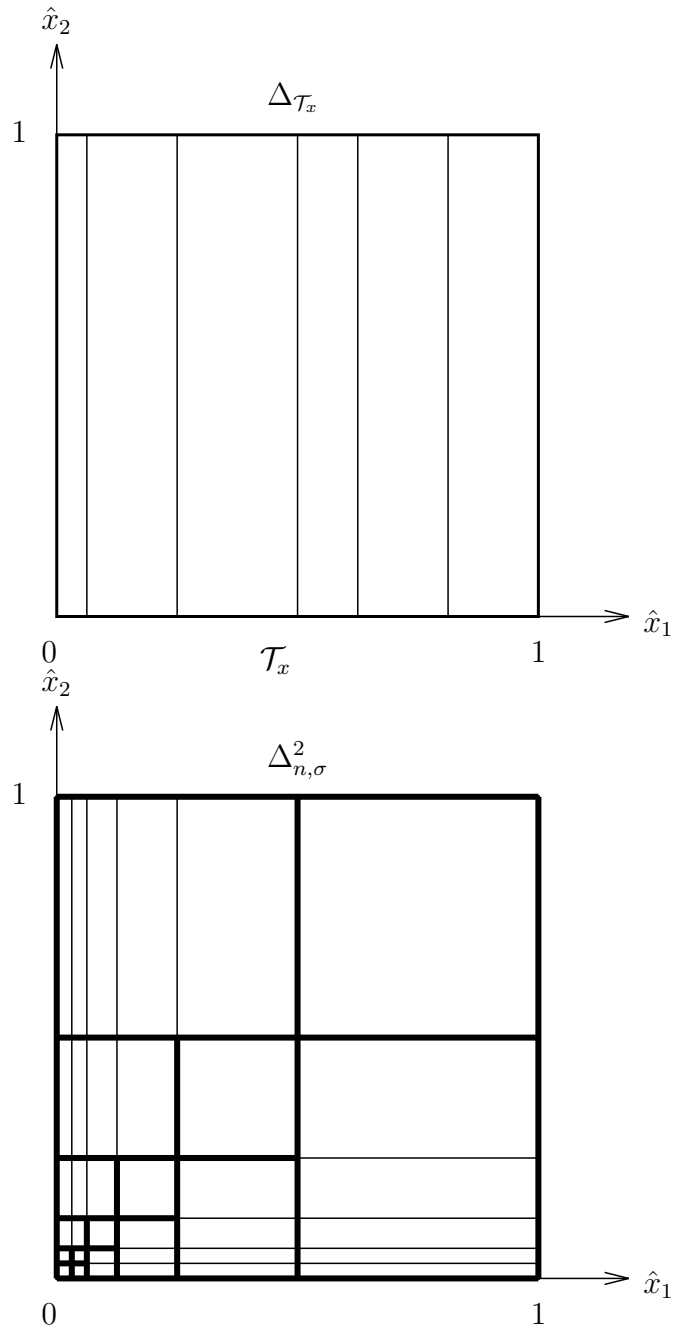


Figure 2.2: Boundary layer mesh and geometric tensor product mesh on \hat{Q} .

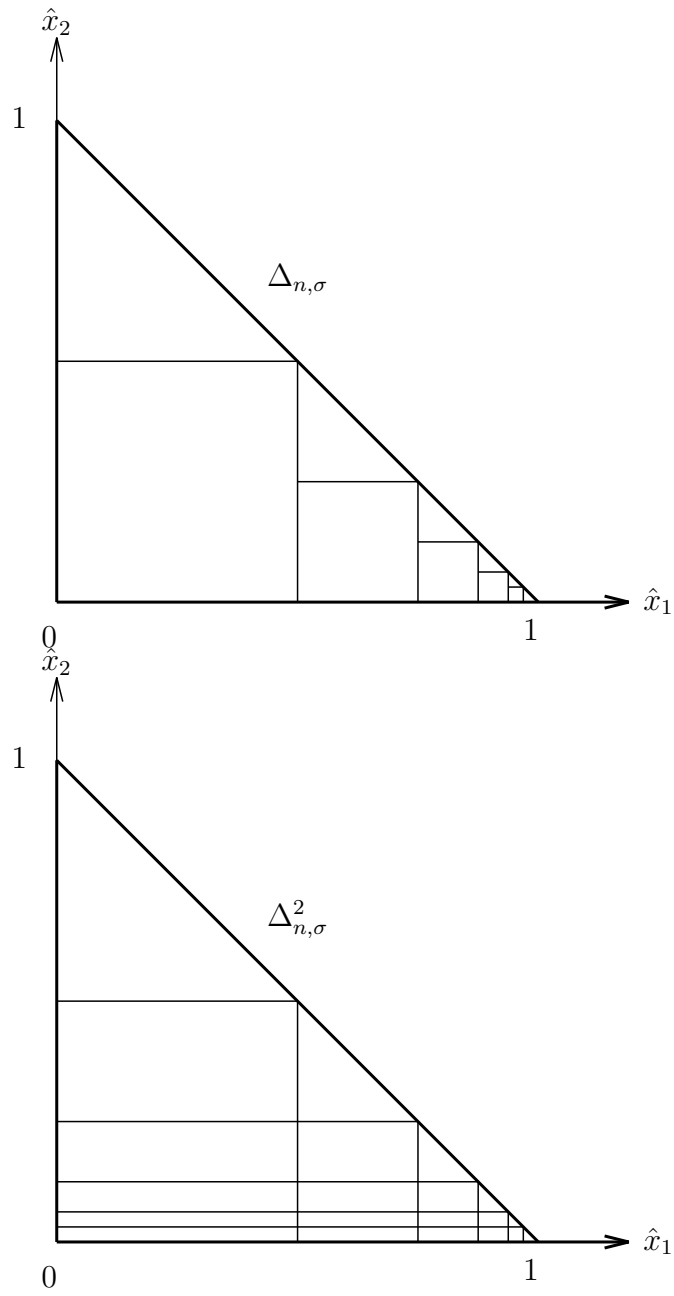


Figure 2.3: The meshes $\Delta_{n,\sigma}$ and $\Delta_{n,\sigma}^2$ on the reference triangle \hat{T} .

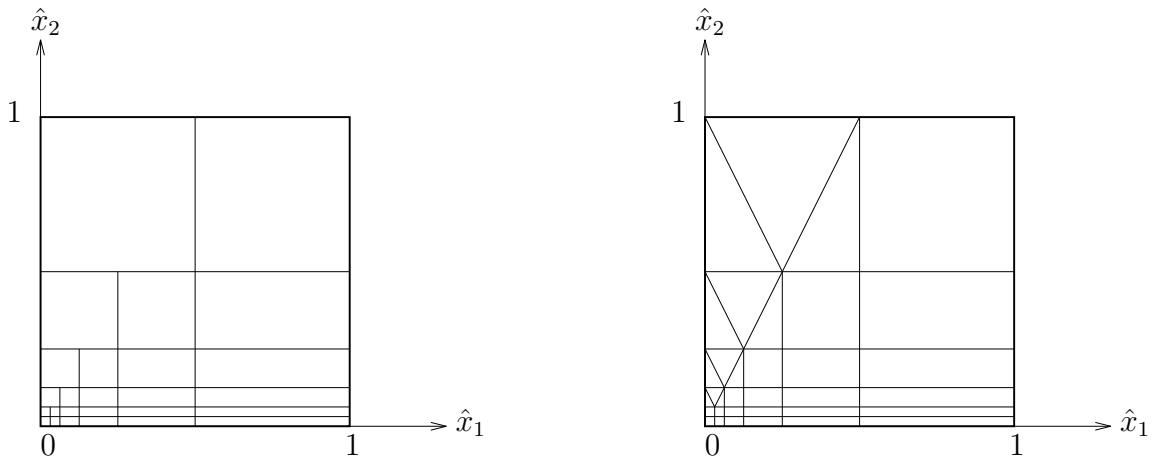


Figure 2.4: Further reference meshes on \hat{Q} .

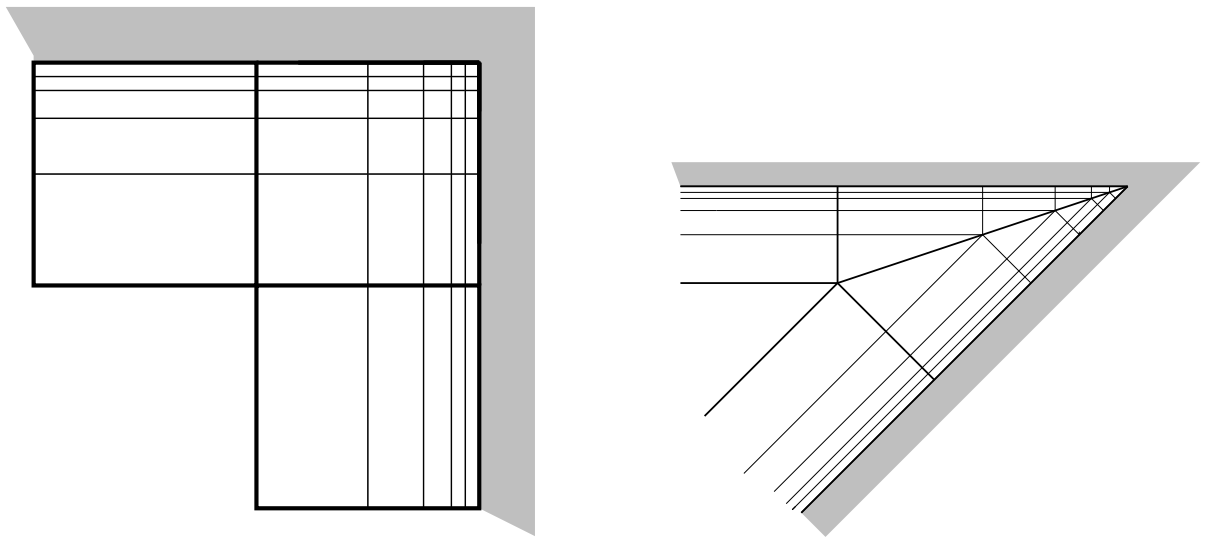


Figure 2.5: Geometric boundary layer meshes near convex corners.

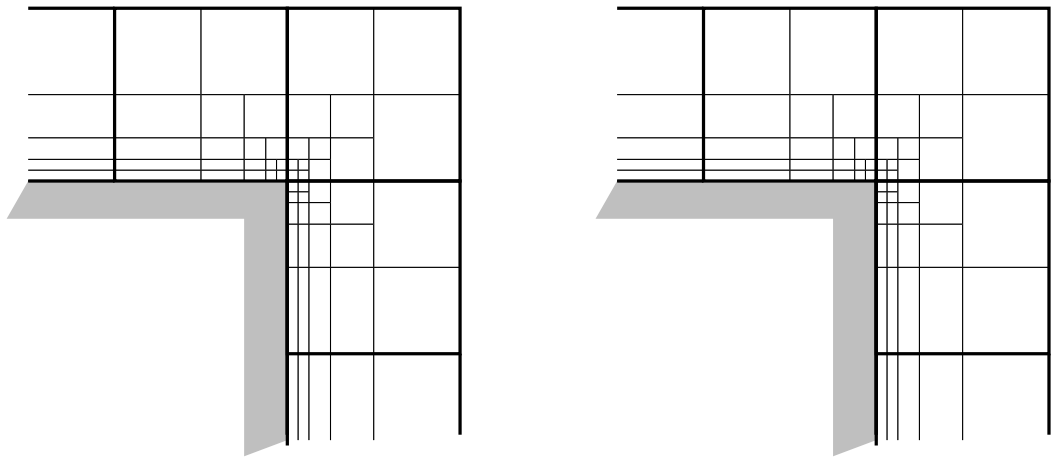


Figure 2.6: Geometric boundary layer meshes near reentrant corners.

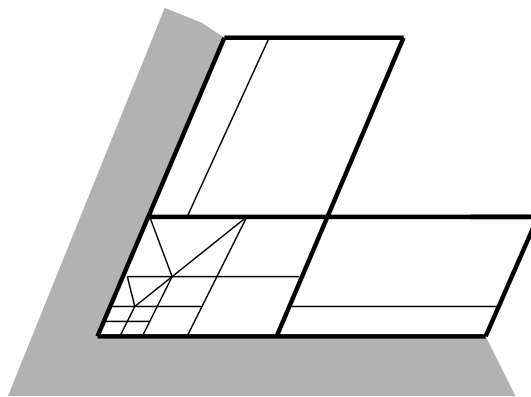


Figure 2.7: The macro-elements are irregularly connected in this mesh.

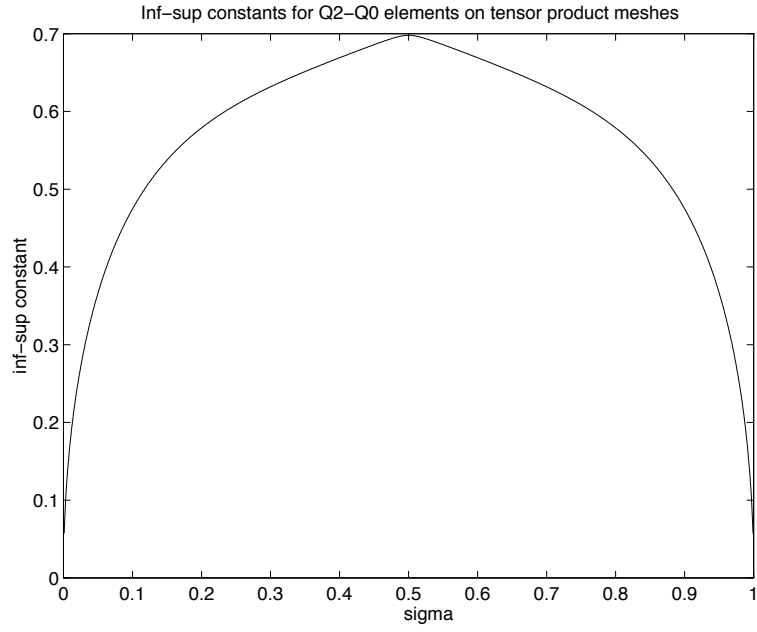


Figure 3.8: Inf-sup constants for $S_0^{2,1} \times S_0^{0,0}$ elements on $\Delta_{1,\sigma}$ for varying σ .

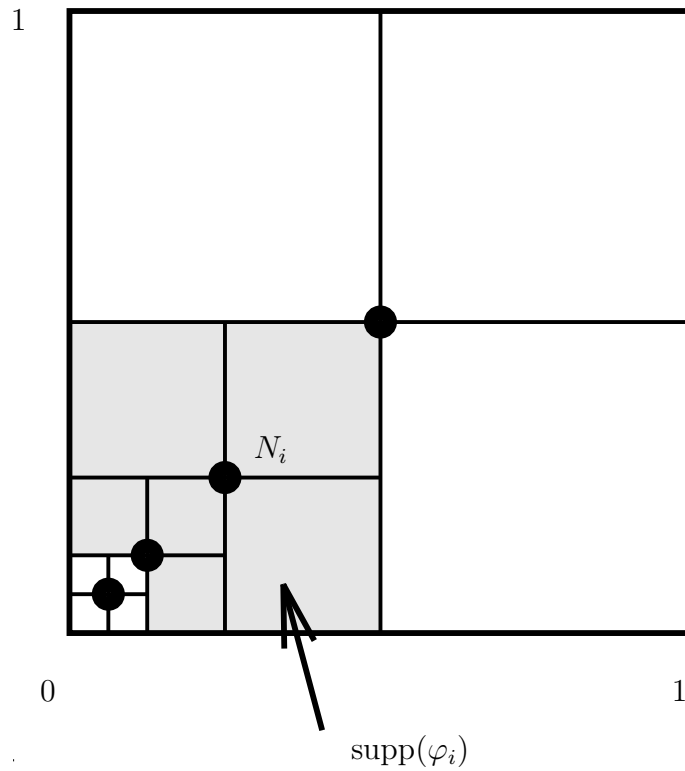


Figure 4.9: Nodes in $S_0^{1,1}(\hat{Q}, \Delta_{n,\sigma})$ and $\text{supp}(\varphi_i)$.

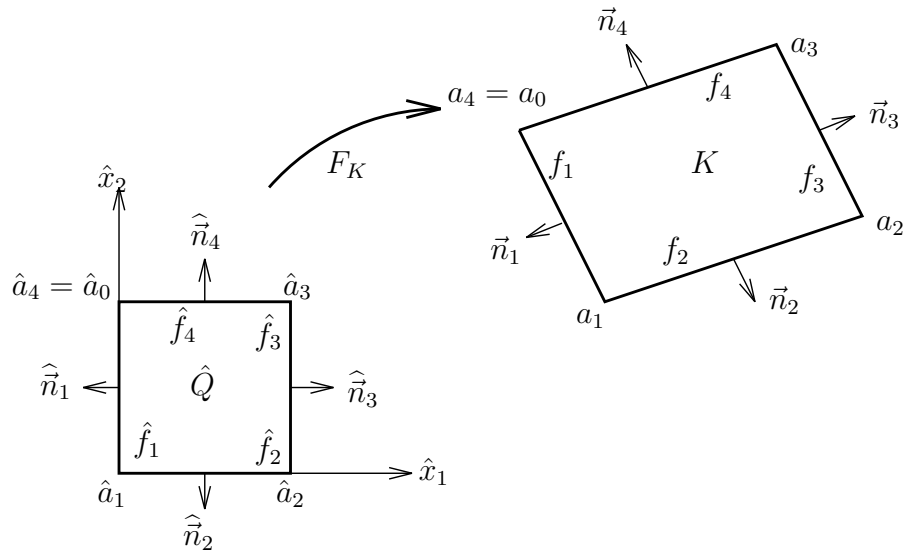


Figure 4.10: Notation for K and \hat{Q} .

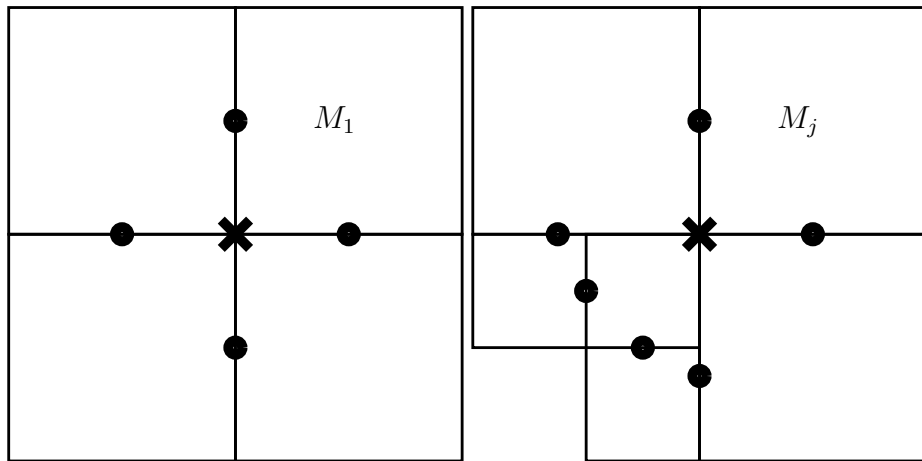


Figure 4.11: The degrees of freedom of $\mathcal{L}_0^{1,1}(M_j)$.

Research Reports

No.	Authors	Title
97-14	D. Schötzau, C. Schwab, R. Stenberg	Mixed hp - FEM on anisotropic meshes II: Hanging nodes and tensor products of boundary layer meshes
97-13	J. Maurer	The Method of Transport for mixed hyperbolic - parabolic systems
97-12	M. Fey, R. Jeltsch, J. Maurer, A.-T. Morel	The method of transport for nonlinear systems of hyperbolic conservation laws in several space dimensions
97-11	K. Gerdes	A summary of infinite element formulations for exterior Helmholtz problems
97-10	R. Jeltsch, R.A. Renaut, J.H. Smit	An Accuracy Barrier for Stable Three-Time-Level Difference Schemes for Hyperbolic Equations
97-09	K. Gerdes, A.M. Matache, C. Schwab	Analysis of membrane locking in hp FEM for a cylindrical shell
97-08	T. Gutzmer	Error Estimates for Reconstruction using Thin Plate Spline Interpolants
97-07	J.M. Melenk	Operator Adapted Spectral Element Methods. I. Harmonic and Generalized Harmonic Polynomials
97-06	C. Lage, C. Schwab	Two Notes on the Implementation of Wavelet Galerkin Boundary Element Methods
97-05	J.M. Melenk, C. Schwab	An hp Finite Element Method for convection-diffusion problems
97-04	J.M. Melenk, C. Schwab	hp FEM for Reaction-Diffusion Equations. II. Regularity Theory
97-03	J.M. Melenk, C. Schwab	hp FEM for Reaction-Diffusion Equations. I: Robust Exponential Convergence
97-02	D. Schötzau, C. Schwab	Mixed hp -FEM on anisotropic meshes
97-01	R. Sperb	Extension of two inequalities of Payne
96-22	R. Bodenmann, A.-T. Morel	Stability analysis for the method of transport
96-21	K. Gerdes	Solution of the 3D-Helmholtz equation in exterior domains of arbitrary shape using HP -finite infinite elements
96-20	C. Schwab, M. Suri, C. Xenophontos	The hp finite element method for problems in mechanics with boundary layers
96-19	C. Lage	The Application of Object Oriented Methods to Boundary Elements
96-18	R. Sperb	An alternative to Ewald sums. Part I: Identities for sums