

# Trefftz discontinuous Galerkin methods for acoustic scattering on locally refined meshes

R. Hiptmair, A. Moiola and I. Perugia

Research Report No. 2012-06  
March 2012

Seminar für Angewandte Mathematik  
Eidgenössische Technische Hochschule  
CH-8092 Zürich  
Switzerland

# Trefftz Discontinuous Galerkin Methods for Acoustic Scattering on Locally Refined Meshes

Ralf Hiptmair<sup>1</sup>, Andrea Moiola<sup>2</sup>, Ilenia Perugia<sup>3</sup>

---

## Abstract

We extend the a priori error analysis of Trefftz-discontinuous Galerkin methods for time-harmonic wave propagation problems developed in [R. HIPTMAIR, A. MOIOLA, AND I. PERUGIA, *Plane wave discontinuous Galerkin methods for the 2d Helmholtz equation: Analysis of the p-version*, SIAM J. Numer. Anal., 49 (2011), pp. 264–284] to acoustic scattering problems and locally refined meshes. To this aim, we prove refined regularity and stability results with explicit dependence of the stability constant on the wave number for non convex domains with non connected boundaries. Moreover, we devise a new choice of numerical flux parameters for which we can prove  $L^2$ -error estimates in the case of locally refined meshes near the scatterer. This is the setting needed to develop a complete  $hp$ -convergence analysis.

*Keywords:* Acoustic scattering, wave propagation, discontinuous Galerkin methods, Trefftz methods,  $hp$ -error analysis, duality estimates  
65N15, 65N30, 35J05

---

*Email addresses:* [hiptmair@sam.math.ethz.ch](mailto:hiptmair@sam.math.ethz.ch) (Ralf Hiptmair),  
[a.moiola@reading.ac.uk](mailto:a.moiola@reading.ac.uk) (Andrea Moiola), [ilena.perugia@unipv.it](mailto:ilena.perugia@unipv.it) (Ilenia Perugia)  
*URL:* <http://www.sam.math.ethz.ch/~hiptmair/> (Ralf Hiptmair),  
<http://www.reading.ac.uk/maths-and-stats/about/Staff/a-moiola.aspx> (Andrea Moiola), <http://www-dimat.unipv.it/perugia/> (Ilenia Perugia)

<sup>1</sup>Seminar für Angewandte Mathematik ETHZ, Rämistrasse 101, 8092 Zürich, Switzerland

<sup>2</sup>Department of Mathematics and Statistics, University of Reading, Whiteknights, PO Box 220, Reading RG6 6AX, UK

<sup>3</sup>Dipartimento di Matematica, Università di Pavia Via Ferrata 1, 27100 Pavia, Italy

## 1. Introduction

Trefftz-discontinuous Galerkin methods (TDG) are volume mesh based discretizations of linear boundary value problems that aim to achieve efficient approximation by the use of trial functions in the null spaces of the differential operator. They have attracted particular attention for problems that are notoriously challenging for polynomial approximation. A prominent representative is time-harmonic acoustic wave propagation in the medium frequency range, whose TDG discretization is at the focus of this article.

The method itself in combination with plane wave approximation was introduced in [14] and extended to electromagnetic fields in [16]. It generalizes the so-called ultra-weak variational formulation (UWVF) by Cessenat and Despres [8, 7]. Practical experience with this method [19] suggests that for good performance it should be used on *locally refined meshes* together with *spatially varying resolution* of the plane wave trial space. Morally speaking, the sophisticated *hp*-refinement strategy that ensures exponential convergence (in the number of degrees of freedom) for classical polynomial Galerkin finite element approximation of second-order elliptic boundary value problem (see [2, 35, 33, 34]; see also [24] for the Helmholtz problem) should also be adopted for TDG.

Hitherto, in the DG context, only polynomial theory could cover this setting [13, 23], but it remained outside the scope of existing TDG theory. Whereas the a priori convergence estimates in [14] merely addressed *h*-refinement, the corresponding *p*-convergence results in [17] exclude local mesh refinement and require convex computational domains. The present article remedies these shortcomings and establishes TDG discretization error estimates for acoustic scattering at a sound-soft object, which remain valid for arbitrary variable resolutions of the local Trefftz trial spaces and in the presence of rather general local mesh refinement. More precisely, quasi-uniformity must hold only close to the outer (smooth) artificial boundary, while strong local refinement near the scatterer is allowed, see Figure 1. All meshes created by standard *hp*-refinement policies belong to this class.

The new theory is a substantially enhanced version of the approach of [17] (see also [25, Sec. 4.3]). Again we employ a duality argument similar to the ones used in [29, 5]. Yet, in order to dispense with the convexity assumption, we prove refined regularity and stability results for the acoustic scattering problem with explicit dependence of the stability constant on the wave number, see Sect. 2.1. These estimates are combined with the key

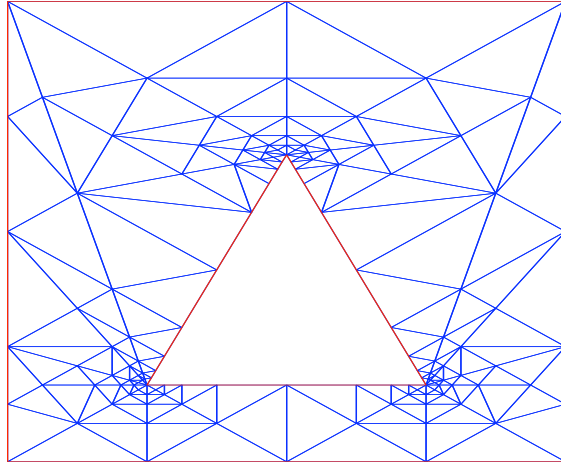


Figure 1: Mesh locally refined near the scatterer

idea to offset non-uniform element sizes by judiciously varying local parameters in the numerical fluxes for the discontinuous Galerkin discretization, see Sect. 4.2. This paves the way for the main  $L^2$ -error estimate of Theorem 4.5.

The results of this paper are a stepping stone towards a complete  $hp$ -convergence theory that we hope will eventually confirm exponential convergence (in terms of number of degrees of freedom) of a wide range of TDG methods for the Helmholtz equation, provided proper local refinements and choice of local resolutions. As of 2012, this is ongoing work and preliminary results are reported in Sect. 5.

## 2. Scattering problem

We consider the scattering of acoustic waves at a sound soft scatterer occupying the domain  $\Omega_D \subset \mathbb{R}^N$ ,  $N = 2, 3$ . This domain is supposed to be a bounded Lipschitz polygon ( $N = 2$ ) or polyhedron ( $N = 3$ ) that is *star-shaped* with respect to the origin  $\mathbf{0}$ . The medium outside  $\Omega_D$  is supposed to be homogeneous and isotropic.

A known time-harmonic smooth incident field impinges on  $\Omega_D$ . It is described by its complex amplitude  $u^i$  and wave number  $k = \omega/c$ , where  $\omega$  denotes the angular frequency and  $c$  the speed of sound in the medium. To fix the notation, we assume  $k > 0$ , although the sign of  $k$  is not essential.

The total field  $u = u^i + u^s$ , where  $u^s$  is the scattered wave, satisfies the following Dirichlet boundary value problem for the Helmholtz equation in

$\mathbb{R}^N \setminus \overline{\Omega}_D$  (see [Sect. 2.1][10]):

$$\begin{aligned}
-\Delta u - k^2 u &= 0 && \text{in } \mathbb{R}^N \setminus \overline{\Omega}_D, \\
u &= 0 && \text{on } \Gamma_D := \partial\Omega_D, \\
\lim_{|\mathbf{x}| \rightarrow \infty} |\mathbf{x}| \left( \frac{\partial u^s(\mathbf{x})}{\partial |\mathbf{x}|} + iku^s(\mathbf{x}) \right) &= 0.
\end{aligned} \tag{1}$$

The use of volume mesh based discretization entails truncation of the unbounded domain. Therefore, we introduce another bounded Lipschitz domain  $\Omega_R$ , with boundary  $\Gamma_R$ , that contains  $\overline{\Omega}_D$  such that

$$\text{dist}(\Gamma_D, \Gamma_R) > 0;$$

see Fig. 2. The outer boundary  $\Gamma_R$  will usually be smooth, though we also admit polygonal ( $N = 2$ ) or polyhedral ( $N = 3$ )  $\Omega_R$ . The last condition

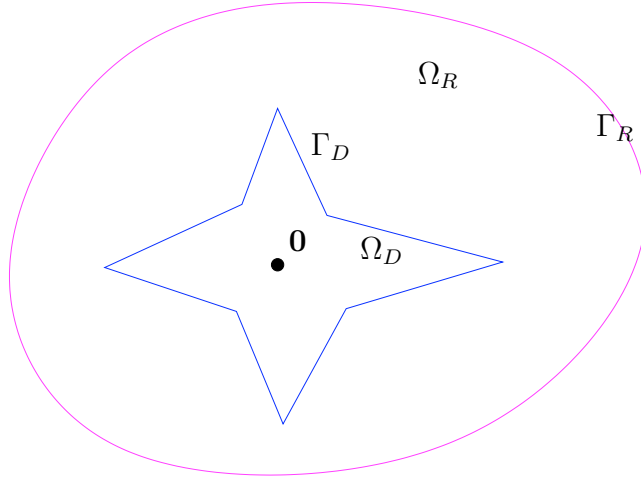


Figure 2: Geometric setting for boundary value problem

in (1) (i.e., the Sommerfeld radiation condition) can be approximated by an impedance boundary condition as a first order absorbing boundary condition:

$$\begin{aligned}
-\Delta u - k^2 u &= 0 && \text{in } \Omega := \Omega_R \setminus \overline{\Omega}_D, \\
u &= 0 && \text{on } \Gamma_D, \\
\frac{\partial u}{\partial \mathbf{n}} + ik\vartheta u &= g_R && \text{on } \Gamma_R.
\end{aligned} \tag{2}$$

Here,  $\mathbf{n}$  is the unit normal vector field that is outgoing from  $\Omega := \Omega_R \setminus \overline{\Omega}_D$  (i.e., outgoing from  $\Omega_R$  and ingoing into  $\Omega_D$ ),  $g_R := \frac{\partial u^i}{\partial \mathbf{n}} + ik\vartheta u^i$  is the impedance trace of the incoming wave, thus it is supposed to be known, and  $\vartheta$  is a continuous real valued function, independent of  $k$  and  $u$ , defined on  $\Gamma_R$  such that

$$0 < \vartheta_* := \inf_{\mathbf{x} \in \Gamma_R} \vartheta(\mathbf{x}) \leq \sup_{\mathbf{x} \in \Gamma_R} \vartheta(\mathbf{x}) =: \vartheta^* < \infty .$$

We assume that the artificial domain  $\Omega_R$  is star-shaped with respect to the open ball  $B_{\gamma_R d_\Omega}(\mathbf{0}) = \{\mathbf{x} \in \mathbb{R}^N, |\mathbf{x}| < \gamma_R d_\Omega\}$ , for some  $\gamma_R > 0$ , where

$$d_\Omega := \text{diam}(\Omega) ;$$

this and the assumption that the scatterer  $\Omega_D$  is star-shaped with respect to the origin translate into

$$\mathbf{n}(\mathbf{x}) \cdot \mathbf{x} \leq 0 \quad \text{a.e. on } \Gamma_D , \quad \mathbf{n}(\mathbf{x}) \cdot \mathbf{x} \geq \gamma_R d_\Omega > 0 \quad \text{a.e. on } \Gamma_R .$$

These inequalities are meant to hold for every point  $\mathbf{x}$  at which  $\mathbf{n}(\mathbf{x})$  is defined (see [18, Lemma 3.1]).

We point out that our approach can also deal with the case  $\Gamma_D = \emptyset$ , i.e., a cavity impedance boundary value problem without scatterer.

Notice that this setting is different from the one studied in [9], where the domains are assumed to be smooth, and the exact Dirichlet-to-Neumann map is used instead of the impedance boundary condition.

### 2.1. Well-posedness and stability

For later use in a duality argument, we consider a slightly more general situation than (2), namely the inhomogeneous boundary value problem:

$$\begin{aligned} -\Delta u - k^2 u &= f && \text{in } \Omega , \\ u &= 0 && \text{on } \Gamma_D , \\ \frac{\partial u}{\partial \mathbf{n}} \pm ik\vartheta u &= g_R && \text{on } \Gamma_R , \end{aligned} \tag{3}$$

for given  $f \in L^2(\Omega)$  and  $g_R \in L^2(\Gamma_R)$ .

We introduce the space  $H_{\Gamma_D}^1(\Omega) = \{u \in H^1(\Omega), u = 0 \text{ on } \Gamma_D\}$ . We denote by  $\|\cdot\|_{s,D}$  the  $H^s(D)$ -norm,  $s \in \mathbb{R}$ , and by  $|\cdot|_{\ell,D}$  the  $H^\ell(D)$ -seminorm,  $\ell \in \mathbb{N}$ , where  $D$  is either a domain or a manifold (of smoothness  $C^{[|s|]-1,1}$

and  $C^{\ell-1,1}$ , respectively). We also define the following  $k$ -weighted Sobolev norms on  $D$ :

$$\|v\|_{\ell,k,D}^2 := \sum_{j=0}^{\ell} k^{2(\ell-j)} |u|_{j,D}^2 \quad \forall v \in H^\ell(D), \ell \in \mathbb{N}.$$

The variational formulation of the boundary value problem (3) reads: find  $u \in H_{\Gamma_D}^1(\Omega)$  such that, for all  $v \in H_{\Gamma_D}^1(\Omega)$ ,

$$\int_{\Omega} \left( \nabla u \cdot \nabla \bar{v} - k^2 u \bar{v} \right) dV \pm ik \int_{\Gamma_R} \vartheta u \bar{v} dS = \int_{\Omega} f \bar{v} dV + \int_{\Gamma_R} g_R \bar{v} dS. \quad (4)$$

The use of impedance (Robin) boundary condition prevents the occurrence of eigenvalues and ensures the well-posedness of the problem.

**Theorem 2.1.** *Problem (4) admits a unique solution  $u \in H_{\Gamma_D}^1(\Omega)$ .*

*Proof.* The bilinear form on the right-hand side of (4) satisfies a Gårding inequality (see [20, p. 118]); then, by [20, Th. 4.11 and Th. 4.12], problem (4) (and thus (3)) admits a unique solution if and only if its adjoint problem with  $f = 0$  and zero boundary data  $g_R = 0$  admits only the trivial solution. Since the adjoint problem is obtained by simply switching the sign in front of the term  $ik\vartheta u$  in the impedance boundary condition, we only have to show that, whenever  $f = 0$  and  $g_R = 0$ , problem (3) has only the solution  $u \equiv 0$ .

In fact, if  $f = 0$  and  $g_R = 0$ , by taking  $v = u$  in (4), and considering the imaginary part of the resulting equation, we infer  $\left\| \vartheta^{\frac{1}{2}} u \right\|_{0,\Gamma_R} = 0$ ; thus, from the impedance boundary condition in (3),  $\frac{\partial u}{\partial \mathbf{n}} = u = 0$  on  $\Gamma_R$ . As a consequence, extending  $u$  by zero outside  $\Omega_R$  we obtain a function  $\tilde{u}$  that satisfies  $-\Delta \tilde{u} - k^2 \tilde{u} = 0$  in  $\mathbb{R}^N \setminus \overline{\Omega}_D$  and  $\tilde{u} = 0$  on  $\Gamma_D$ . Owing to the uniqueness of solutions of exterior Dirichlet problems for the Helmholtz equation [31, Th. 2.6.5] we conclude  $\tilde{u} = 0$ .  $\square$

The Fredholm argument in the proof of Theorem 2.1 also provides stability bounds on the solution  $u$  of problem (4) in terms of the data  $f$  and  $g_R$ , but with no information on the possible dependence of the stability constants on the wave number  $k$ . Since we need to know this dependence explicitly we rely on the stability results of [15], which were obtained by means of Rellich estimates (the same results were proved in [21, Prop. 8.1.4] in 2D, and in [11] in 3D in the case  $\Gamma_D = \emptyset$ ; see also [32], [30, Chap. 5], [20, p. 146], [9, Lemma 2.3, Lemma 3.5], and [36]).

**Theorem 2.2.** [15, Prop. 3.3 and 3.4] *Let  $u$  be the unique solution to problem (4). Under our assumptions on the problem domain and boundary conditions, there exists a constant  $C > 0$  depending only on  $\gamma_R$  and  $\vartheta$ , but independent of  $k$ ,  $f$ ,  $g_R$  and  $u$ , such that*

$$\|u\|_{1,k,\Omega} \leq C(d_\Omega \|f\|_{0,\Omega} + d_\Omega^{\frac{1}{2}} \|g_R\|_{0,\Gamma_R}) . \quad (5)$$

We point out that the assumptions made in [15, Prop. 3.3 and 3.4] rule out the case of a sound hard scatterer (in the proofs of [15], a possible Neumann boundary  $\Gamma_N$  has to be such that  $\mathbf{n}(\mathbf{x}) \cdot \mathbf{x} = 0$  on  $\Gamma_N$ , thus it can not be the boundary of a bounded region); for this reason we restrict ourselves to the case of a sound soft scatterer.

## 2.2. Regularity

Our error analysis of the TDG method hinges on the assumption of  $H^{\frac{3}{2}+s}$ -regularity of the analytical solutions of (3), for some positive  $s$ . The following theorem ensures this regularity and states stability estimates of the solutions in the  $H^{\frac{3}{2}+s}$ -norm.

**Theorem 2.3.** *Let  $u$  be the solution of problem (3). If  $f \in L^2(\Omega)$  and  $g_R \in H^r(\Gamma_R)$  for a given  $0 < r < 1/2$ , then there exists  $s_\Omega > 0$  depending only on (the edges and corners of)  $\Omega$ , such that  $u \in H^{\frac{3}{2}+s}(\Omega)$  for every  $s$  satisfying*

$$0 < s < s_\Omega , \quad s \leq r , \quad (6)$$

and the following bound holds<sup>4</sup>:

$$|\nabla u|_{\frac{1}{2}+s,\Omega} \leq C(1 + d_\Omega k) \left( d_\Omega^{\frac{1}{2}-s} \|f\|_{0,\Omega} + d_\Omega^{-s} \|g_R\|_{0,\Gamma_R} \right) + C \|g_R\|_{s,\Gamma_R} , \quad (7)$$

where the constant  $C > 0$  depends only on  $s$ ,  $\gamma_R$  and  $\vartheta$ , but is independent of  $k$ ,  $f$ ,  $g_R$  and  $u$ .

*Proof.* First, we consider the case  $\Omega_D = \emptyset$ . The second part of Neumann-Poisson regularity Theorem 3.18 of [28] tells us that there exists  $s_N > 0$

---

<sup>4</sup> In order to obtain bounding constants that are independent of the size of  $\Omega$ , the fractional Sobolev norm are weighted with the diameter  $d_\Omega$  as  $\|v\|_{s,\Gamma_R}^2 := |v|_{s,\Gamma_R}^2 + d_\Omega^{-2s} \|v\|_{0,\Gamma_R}^2$ , for every  $v \in H^s(\Gamma_R)$  and  $0 < s < 1/2$ , where the  $H^s$ -seminorm is defined by the Sobolev-Slobodeckij integral (see [28, p. 43]).



depending only on  $\Omega$  such that  $u$  belongs to  $H^{\frac{3}{2}+s}(\Omega)$  for all  $0 < s < s_N$ ,  $s \leq r$ ; moreover, due to the closed graph theorem, we have

$$\begin{aligned}
|u|_{\frac{3}{2}+s,\Omega} &\leq C \left( d_{\Omega}^{\frac{1}{2}-s} \|\Delta u\|_{0,\Omega} + \left\| \frac{\partial u}{\partial \mathbf{n}} \right\|_{s,\Gamma_R} \right) \\
&\stackrel{(3)}{\leq} C \left( d_{\Omega}^{\frac{1}{2}-s} \|f\|_{0,\Omega} + d_{\Omega}^{\frac{1}{2}-s} k^2 \|u\|_{0,\Omega} + \|g_R\|_{s,\Gamma_R} + k \|\vartheta\|_{L^\infty(\Gamma_R)} \|u\|_{s,\Gamma_R} \right) \\
&\stackrel{\text{trace th. [20, Th. 3.37]}}{\leq} C \left( d_{\Omega}^{\frac{1}{2}-s} k \|u\|_{1,k,\Omega} + d_{\Omega}^{\frac{1}{2}-s} \|f\|_{0,\Omega} + \|g_R\|_{s,\Gamma_R} \right) \\
&\stackrel{(5)}{\leq} C(1 + d_{\Omega}k) \left( d_{\Omega}^{\frac{1}{2}-s} \|f\|_{0,\Omega} + d_{\Omega}^{-s} \|g_R\|_{0,\Gamma_R} \right) + C \|g_R\|_{s,\Gamma_R} , \quad (8)
\end{aligned}$$

where the constant  $C > 0$  is independent of  $k$  and  $u$ .

Now we consider the case  $\Omega_D \neq \emptyset$ . Let  $\partial G_1$  and  $\partial G_2$  be two smooth closed curves/surfaces bounding the open domains  $G_1$  and  $G_2$ , respectively, such that

$$\overline{\Omega}_D \subset G_1 , \quad \overline{G}_1 \subset G_2 , \quad \overline{G}_2 \subset \Omega_R .$$

Let  $\chi \in \mathcal{D}(G_2)$  be a real-valued cut-off function such that  $0 \leq \chi \leq 1$  and  $\chi \equiv 1$  in  $G_1$ . Again, denote by  $\chi$  its extension by zero to  $\mathbb{R}^N$ .

By the product rule  $(\Delta(\phi\psi) = \phi\Delta\psi + \psi\Delta\phi + 2\nabla\phi \cdot \nabla\psi)$ ,  $u_1 := \chi u$  solves

$$\begin{aligned}
-\Delta u_1 &= \chi(f + k^2 u) - u \Delta \chi - 2\nabla \chi \cdot \nabla u \quad \text{in } \Omega , \\
u_1 &= 0 \quad \text{on } \Gamma_R \cup \Gamma_D .
\end{aligned}$$

Then, the first part of [28, Th. 3.18] (with  $\mu = 0$ ) implies that there exists  $s_D > 0$  depending only on  $\Omega$  such that  $u_1 \in H^{\frac{3}{2}+s}(\Omega)$  for all  $0 < s < s_D$ . Moreover, due to the closed graph theorem, we infer

$$\begin{aligned}
|u_1|_{\frac{3}{2}+s,\Omega} &\leq C d_{\Omega}^{\frac{1}{2}-s} \|\Delta u_1\|_{0,\Omega} \\
&\leq C d_{\Omega}^{\frac{1}{2}-s} \left( \|f\|_{0,\Omega} + (d_{\Omega}^{-2} + k^2) \|u\|_{0,\Omega} + d_{\Omega}^{-1} |u|_{1,\Omega} \right) \\
&\stackrel{\text{Poincaré}}{\leq} C d_{\Omega}^{\frac{1}{2}-s} \left( \|f\|_{0,\Omega} + k^2 \|u\|_{0,\Omega} + d_{\Omega}^{-1} |u|_{1,\Omega} \right) \\
&\stackrel{(5)}{\leq} C(1 + d_{\Omega}k) \left( d_{\Omega}^{\frac{1}{2}-s} \|f\|_{0,\Omega} + d_{\Omega}^{-s} \|g_R\|_{0,\Gamma_R} \right) , \quad (9)
\end{aligned}$$

where all constants are independent of  $k$  and  $u$ .

Denote by  $\tilde{u}$  and  $\tilde{f}$  the extensions by zero of  $u$  and  $f$ , respectively, to  $\Omega_R$ ; clearly,  $\tilde{u} \in H^1(\Omega_R)$  and  $\tilde{f} \in L^2(\Omega_R)$ . The function  $u_2 := (1 - \chi)\tilde{u}$  solves

$$\begin{aligned} -\Delta u_2 - k^2 u_2 &= (1 - \chi)\tilde{f} + \tilde{u} \Delta \chi + 2\nabla \chi \cdot \nabla \tilde{u} && \text{in } \Omega_R, \\ \frac{\partial u_2}{\partial \mathbf{n}} \pm ik \vartheta u_2 &= g_R && \text{on } \Gamma_R. \end{aligned}$$

The first part of this proof for the case  $\Omega_D = \emptyset$  applies to  $u_2$  (denote again by  $s_N$  the regularity parameter). Thus, since  $u_2 = \tilde{f} = 0$  in  $\Omega_D$  and  $u_2 = u$  on  $\Gamma_R$ , the analogue of estimate (8) implies

$$|u_2|_{\frac{3}{2}+s, \Omega} \leq C(1 + d_\Omega k) \left( d_\Omega^{\frac{1}{2}-s} \|f\|_{0, \Omega} + d_\Omega^{-s} \|g_R\|_{0, \Gamma_R} \right) + C \|g_R\|_{s, \Gamma_R}. \quad (10)$$

Thus, since  $u = u_1 + u_2|_\Omega$ , then  $u \in H^{\frac{3}{2}+s}(\Omega)$  for all  $0 < s < s_\Omega$ ,  $s \leq r$ , where  $s_\Omega := \min\{s_D, s_N\}$ ; moreover, (9) and (10) give the bound (7).  $\square$

*Remark 2.4.* Whenever  $\Omega_D = \emptyset$  and  $\Omega_R$  is convex, if  $r = 1/2$  then  $u \in H^2(\Omega)$  and (7) holds with  $s = 1/2$  (see [21, 11]).

### 3. The Trefftz discontinuous Galerkin (TDG) method

We briefly review the derivation and formulation of our TDG method for the discretization of problem (2), see also [17, Sect. 2] and [14, Sect. 2].

#### 3.1. Notation

Let  $\mathcal{T}_h = \{K\}$  be a finite element partition of  $\Omega$ , possibly featuring hanging nodes. Its cells are supposed to be affine images of a few simple reference elements, which holds, for instance, for simplicial partitions into triangles ( $N = 2$ ) or tetrahedra ( $N = 3$ ). We write  $h$  for the mesh width of  $\mathcal{T}_h$ , i.e.,  $h = \max_{K \in \mathcal{T}_h} h_K$ , with  $h_K := \text{diam}(K)$ . On  $\mathcal{T}_h$  we will define our TDG method. We denote by  $\mathcal{F}_h = \bigcup_{K \in \mathcal{T}_h} \partial K$  the skeleton of the mesh, and set  $\mathcal{F}_h^R = \mathcal{F}_h \cap \Gamma_R$ ,  $\mathcal{F}_h^D = \mathcal{F}_h \cap \Gamma_D$  and  $\mathcal{F}_h^I = \mathcal{F}_h \setminus (\mathcal{F}_h^R \cup \mathcal{F}_h^D)$ .

We also introduce some standard DG notation [1]. Write  $\mathbf{n}^+$ ,  $\mathbf{n}^-$  and  $\mathbf{n}_K$  for the exterior unit normals on  $\partial K^+$ ,  $\partial K^-$  and  $\partial K$ , respectively. Let  $v$  and  $\boldsymbol{\tau}$  be a piecewise smooth function and vector field on  $\mathcal{T}_h$ , respectively. On  $\partial K^- \cap \partial K^+$ , we define

$$\text{the averages: } \{v\} := \frac{1}{2}(v^+ + v^-) \quad , \quad \{\boldsymbol{\tau}\} := \frac{1}{2}(\boldsymbol{\tau}^+ + \boldsymbol{\tau}^-) \quad ,$$

the jumps:  $\llbracket v \rrbracket_N := v^+ \mathbf{n}^+ + v^- \mathbf{n}^-$  ,  $\llbracket \boldsymbol{\tau} \rrbracket_N := \boldsymbol{\tau}^+ \cdot \mathbf{n}^+ + \boldsymbol{\tau}^- \cdot \mathbf{n}^-$  .

Furthermore, we will denote by  $\nabla_h$  the elementwise application of  $\nabla$ .

Finally, for a given mesh  $\mathcal{T}_h$ , we introduce the TDG finite element spaces with local resolutions  $\{p_K\}_{K \in \mathcal{T}_h}$  given by

$$V_p(\mathcal{T}_h) = \{v_{hp} \in L^2(\Omega) : v_{hp}|_K \in V_{p_K}(K) \forall K \in \mathcal{T}_h\} ,$$

where  $V_{p_K}(K)$  is a  $p_K$ -dimensional space of functions on  $K$  that enjoy the *Trefftz property*, i.e.,

$$-\Delta v_{hp} - k^2 v_{hp} = 0 \quad \forall v_{hp} \in V_{p_K}(K) . \quad (11)$$

Examples of Trefftz spaces for the Helmholtz problems are linear combinations of plane waves in different directions, or linear combinations of circular/spherical waves, see [25, Ch. 3] and Sect. 5.

### 3.2. Derivation of the TDG method

In contrast to [14, 17] we derive the TDG method for the scattering problem (2) directly from the second-order equations. Multiplying the first equation of (2) by smooth test functions  $v$  and integrating by parts on each  $K \in \mathcal{T}_h$ , we obtain

$$\int_K (\nabla u \cdot \nabla \bar{v} - k^2 u \bar{v}) \, dV - \int_{\partial K} \nabla u \cdot \mathbf{n}_K \bar{v} \, dS = 0 .$$

Now, we integrate by parts a second time, replace  $u$  and  $v$  by discrete functions  $u_{hp}, v_{hp} \in V_p(\mathcal{T}_h)$  and the traces of  $u$  and  $\nabla u$  at  $\partial K$  by *numerical fluxes* to be defined ( $u \rightarrow \hat{u}_{hp}$ ,  $\nabla u \rightarrow ik\hat{\boldsymbol{\sigma}}_{hp}$ ), and get

$$\int_K u_{hp} (-\Delta \bar{v}_{hp} - k^2 \bar{v}_{hp}) \, dV + \int_{\partial K} \hat{u}_{hp} \nabla \bar{v}_{hp} \cdot \mathbf{n}_K \, dS - \int_{\partial K} ik\hat{\boldsymbol{\sigma}}_{hp} \cdot \mathbf{n}_K \bar{v}_{hp} \, dS = 0 . \quad (12)$$

Finally, taking into account the Trefftz property (11) of the test functions  $v_{hp}$ , we can write the elemental TDG formulation:

$$\int_{\partial K} \hat{u}_{hp} \nabla \bar{v}_{hp} \cdot \mathbf{n}_K \, dS - \int_{\partial K} ik\hat{\boldsymbol{\sigma}}_{hp} \cdot \mathbf{n}_K \bar{v}_{hp} \, dS = 0 .$$

In order to complete the definition of the TDG method, like in [17, Sect. 2], we mimic the general form of the fluxes defined in [6] and set

$$ik\widehat{\boldsymbol{\sigma}}_{hp} = \begin{cases} \{\{\nabla_h u_{hp}\}\} - \alpha ik \llbracket u_{hp} \rrbracket_N & \text{on faces in } \mathcal{F}_h^I, \\ \nabla_h u_{hp} - (1 - \delta) (\nabla_h u_{hp} + ik\vartheta u_{hp} \mathbf{n} - g_R \mathbf{n}) & \text{on faces in } \mathcal{F}_h^R, \\ \nabla_h u_{hp} - \alpha ik u_{hp} \mathbf{n} & \text{on faces in } \mathcal{F}_h^D, \end{cases}$$

$$\widehat{u}_{hp} = \begin{cases} \{\{u_{hp}\}\} - \beta (ik)^{-1} \llbracket \nabla_h u_{hp} \rrbracket_N & \text{on faces in } \mathcal{F}_h^I, \\ u_{hp} - \delta ((ik\vartheta)^{-1} \nabla_h u_{hp} \cdot \mathbf{n} + u_{hp} - (ik\vartheta)^{-1} g_R) & \text{on faces in } \mathcal{F}_h^R, \\ 0 & \text{on faces in } \mathcal{F}_h^D, \end{cases}$$

where the so-called flux parameters  $\alpha, \beta, \delta$  are *piecewise constant* and *positive* functions defined on suitable unions of edges/faces. In particular, we demand that

$$0 < \delta \leq 1/2. \quad (13)$$

More precise assumptions on these flux parameters will be specified later, see (21) below.

Adding over all elements, we obtain the following formulation of the TDG method: find  $u_{hp} \in V_p(\mathcal{T}_h)$  such that, for all  $v_{hp} \in V_p(\mathcal{T}_h)$ ,

$$\mathcal{A}_h(u_{hp}, v_{hp}) = \ell_h(v_{hp}), \quad (14)$$

where

$$\begin{aligned} \mathcal{A}_h(u, v) &= \int_{\mathcal{F}_h^I} \{\{u\}\} \llbracket \nabla_h \bar{v} \rrbracket_N dS - \int_{\mathcal{F}_h^I} \beta (ik)^{-1} \llbracket \nabla_h u \rrbracket_N \llbracket \nabla_h \bar{v} \rrbracket_N dS \\ &\quad - \int_{\mathcal{F}_h^I} \{\{\nabla_h u\}\} \cdot \llbracket \bar{v} \rrbracket_N dS + \int_{\mathcal{F}_h^I} \alpha ik \llbracket u \rrbracket_N \cdot \llbracket \bar{v} \rrbracket_N dS \\ &\quad + \int_{\mathcal{F}_h^R} (1 - \delta) u \nabla_h \bar{v} \cdot \mathbf{n} dS - \int_{\mathcal{F}_h^R} \delta (ik\vartheta)^{-1} (\nabla_h u \cdot \mathbf{n}) (\nabla_h \bar{v} \cdot \mathbf{n}) dS \\ &\quad - \int_{\mathcal{F}_h^R} \delta \nabla_h u \cdot \mathbf{n} \bar{v} dS + \int_{\mathcal{F}_h^R} (1 - \delta) ik\vartheta u \bar{v} dS \\ &\quad - \int_{\mathcal{F}_h^D} \nabla_h u \cdot \mathbf{n} \bar{v} dS + \int_{\mathcal{F}_h^D} \alpha ik u \bar{v} dS, \end{aligned}$$

and

$$\ell_h(v) = - \int_{\mathcal{F}_h^R} \delta (ik\vartheta)^{-1} g_R \nabla_h \bar{v} \cdot \mathbf{n} dS + \int_{\mathcal{F}_h^R} (1 - \delta) g_R \bar{v} dS.$$

#### 4. A priori convergence analysis

Well-posedness and abstract a priori error estimates for the TDG method introduced in the previous section are proved essentially like in [17] (see also [25, Sec. 4.3]), with judicious modifications due to the presence of the Dirichlet boundary  $\Gamma_D$  and the reduced regularity of the analytical solutions.

Define the piecewise Trefftz space

$$T(\mathcal{T}_h) := \{v \in L^2(\Omega) : \exists s > 0 \text{ s.t. } v \in H^{\frac{3}{2}+s}(\mathcal{T}_h) \\ \text{and } \Delta v + k^2 v = 0 \text{ in each } K \in \mathcal{T}_h\},$$

where  $H^s(\mathcal{T}_h) = \{v \in L^2(\Omega) : v|_K \in H^s(K) \forall K \in \mathcal{T}_h\}$ , and endow it with the mesh-skeleton norm, see [17, Formula (3.1)],

$$\begin{aligned} \|v\|_{DG}^2 &:= k^{-1} \left\| \beta^{\frac{1}{2}} \llbracket \nabla_h v \rrbracket_N \right\|_{0, \mathcal{F}_h^I}^2 + k \left\| \alpha^{\frac{1}{2}} \llbracket v \rrbracket_N \right\|_{0, \mathcal{F}_h^I}^2 \\ &\quad + k^{-1} \left\| \delta^{\frac{1}{2}} \vartheta^{-\frac{1}{2}} \nabla_h v \cdot \mathbf{n} \right\|_{0, \mathcal{F}_h^R}^2 + k \left\| (1 - \delta)^{\frac{1}{2}} \vartheta^{\frac{1}{2}} v \right\|_{0, \mathcal{F}_h^R}^2 \\ &\quad + k \left\| \alpha^{\frac{1}{2}} v \right\|_{0, \mathcal{F}_h^D}^2; \end{aligned} \quad (15)$$

this is actually a norm in  $T(\mathcal{T}_h)$ . In fact, if  $v \in T(\mathcal{T}_h)$  is such that  $\|v\|_{DG} = 0$ , then  $v \in H_0^1(\Omega)$ ,  $\nabla v \in H(\text{div}; \Omega)$ ,  $\nabla v \cdot \mathbf{n} = 0$  on  $\Gamma_R$  and  $\Delta v + k^2 v = 0$ , thus  $v = 0$  as a consequence of the well-posedness of problem (2).

In order to study the properties of  $\mathcal{A}_h(\cdot, \cdot)$ , we also need to introduce the augmented  $DG$ -norm, cf. [17, Formula (3.2)],

$$\begin{aligned} \|v\|_{DG+}^2 &= \|v\|_{DG}^2 + k \left\| \beta^{-\frac{1}{2}} \{\!\!\{ v \}\!\!\} \right\|_{0, \mathcal{F}_h^I}^2 + k^{-1} \left\| \alpha^{-\frac{1}{2}} \{\!\!\{ \nabla_h v \}\!\!\} \right\|_{0, \mathcal{F}_h^I}^2 \\ &\quad + k \left\| \delta^{-\frac{1}{2}} \vartheta^{\frac{1}{2}} v \right\|_{0, \mathcal{F}_h^R}^2 + k^{-1} \left\| \alpha^{-\frac{1}{2}} \nabla_h v \cdot \mathbf{n} \right\|_{0, \mathcal{F}_h^D}^2. \end{aligned}$$

**Proposition 4.1.** *For all  $v, w \in T(\mathcal{T}_h)$  we have*

$$|\mathcal{A}_h(v, w)| \leq 2 \|v\|_{DG+} \|w\|_{DG}, \quad (16)$$

$$\text{Im}[\mathcal{A}_h(v, v)] = \|v\|_{DG}^2. \quad (17)$$

*Proof.* Repeated application of the Cauchy-Schwarz inequality and  $\delta \leq (1 - \delta) < 1$  give (16) (see [17, Prop. 3.5] and [25, Prop. 4.3.5]), while (17) can be proved by integrating by parts the volume term in (12) and proceeding like in [17, Prop. 3.3] (see also [25, Prop. 4.3.3]).  $\square$

#### 4.1. Well-posedness and error estimates in $DG$ -norm

In this section, we state the well-posedness of the TDG method and an abstract error estimate in the  $DG$ -norm (15).

**Proposition 4.2.** *There exists a unique  $u_{hp}$  solution to (14); moreover, we have*

$$\|u_{hp}\|_{DG} \leq \left\| (1 - \delta)^{\frac{1}{2}} \vartheta^{-\frac{1}{2}} g_R \right\|_{0, \mathcal{F}_h^R} .$$

*Proof.* Existence and uniqueness of solutions to (14) readily follows from (17). By the Cauchy-Schwarz inequality and  $\delta \leq (1 - \delta)$ , see (13), we obtain

$$|\ell_h(v)| \leq \left\| (1 - \delta)^{\frac{1}{2}} \vartheta^{-\frac{1}{2}} g_R \right\|_{0, \mathcal{F}_h^R} \|v\|_{DG} ,$$

which, together with (17), gives the continuous dependence of  $u_{hp}$  on  $g_R$ .  $\square$

**Proposition 4.3.** *Assume that the solution  $u$  of (2) belongs to  $T(\mathcal{T}_h)$  and let  $u_{hp}$  be the solution to (14); then, the TDG formulation is consistent, i.e.,*

$$\mathcal{A}_h(u, v_{hp}) = \ell_h(v_{hp}) \quad \forall v_{hp} \in V_p(\mathcal{T}_h) ,$$

and

$$\|u - u_{hp}\|_{DG} \leq 3 \inf_{v_{hp} \in V_p(\mathcal{T}_h)} \|u - v_{hp}\|_{DG+} .$$

*Proof.* The consistency of the TDG formulation is a consequence of the consistency of the numerical fluxes. For the proof of the error estimate, see [17, Prop. 3.6] and [25, Prop. 4.3.6].  $\square$

#### 4.2. Error estimates in the $L^2$ -norm

Like in [17, Sect. 3.2] (see also [25, Sec. 4.3]), we bound the  $L^2$ -norm of any Trefftz function by using a modified duality argument which was introduced in [29, Theorem 3.1] for convex polygonal ( $N = 2$ ) or polyhedral ( $N = 3$ ) domains, and extended to non convex polygons in [12, Lemma 6.2 (ii)]. Since we want to allow for meshes which can be highly refined close to the scatterer, we dispense with the quasi-uniformity assumption. This will entail major modifications in the arguments compared to the analysis of [17] and [25, Sec. 4.3].

We make the following assumptions on the mesh:

i) *shape regularity*: there exists a constant  $\sigma \geq 1$  independent of the global mesh width  $h$  such that

$$\max_{K \in \mathcal{T}_h} \frac{h_K}{d_K} \leq \sigma, \quad (18)$$

where  $d_K$  is the diameter of the largest ball contained in  $K$ ;

ii) *local quasi-uniformity*: there exists a constant  $\tau \geq 1$  independent of  $h$  such that

$$\tau^{-1} \leq \frac{h_{K_1}}{h_{K_2}} \leq \tau \quad \forall K_1, K_2 \in \mathcal{T}_h \text{ s.t. } \text{meas}_{(N-1)}(\partial K_1 \cap \partial K_2) \neq 0; \quad (19)$$

iii) *quasi-uniformity close to  $\Gamma_R$* : there exists a constant  $\tau_R \geq 1$  independent of  $h$  such that

$$\frac{h}{h_K} \leq \tau_R \quad \forall K \in \mathcal{T}_h \text{ s.t. } \text{meas}_{(N-1)}(\partial K \cap \Gamma_R) \neq 0. \quad (20)$$

Note that most local refinement algorithms for finite element meshes in two and three dimensions are designed to ensure Assumptions i) and ii). Assumption iii) stipulates that all the elements abutting the outer boundary  $\Gamma_R$  have size comparable to  $h$ . Yet, what is important in applications is the possibility of refining the meshes close to the scatterer, rather than close to the artificially introduced outer boundary, which will often be smooth. Figure 1 displays a mesh compliant with i)–iii).

In [17, Sect. 5] the numerical flux parameters  $\alpha, \beta, \delta \in L^\infty(\mathcal{F}_h)$  were chosen as globally constant functions. To cope with locally refined meshes we now allow them to attain different values for different edges ( $N = 2$ ) or faces ( $N = 3$ ) and we assume that those have the following form ( $f$  is an edge/face of the mesh):

$$\alpha|_f = \mathbf{a} \frac{h}{h_f}, \quad \beta|_f = \mathbf{b} \frac{h}{h_f}, \quad \delta|_f = \mathbf{d} \frac{h}{h_f}, \quad (21)$$

where  $\mathbf{a}$ ,  $\mathbf{b}$  and  $\mathbf{d}$  are positive *constants* independent of the mesh width, the local Trefftz trial spaces, and the wave number  $k$ . The symbol  $h_f$  stands for the local mesh width at the edge/face  $f$  defined as  $h_f = \min\{h_{K_1}, h_{K_2}\}$  if  $f = \partial K_1 \cap \partial K_2$ , and  $h_f = h_K$  if  $f = \partial K \cap \partial \Omega$ . Notice that this definition works also in the case of hanging nodes.

Notice that the condition  $\delta \leq 1/2$  is satisfied by choosing  $\mathbf{d} \leq (2\tau_R)^{-1}$  with  $\tau_R$  from (20). This is the rationale behind assuming (20).

**Lemma 4.4.** *There exists a constant  $C > 0$  depending only on  $\sigma$ ,  $s$ ,  $\vartheta$ ,  $\gamma_R$  and the flux parameters  $\mathbf{a}$ ,  $\mathbf{b}$  and  $\mathbf{d}$  (thus independent of  $h$ ,  $p$  and  $k$ ), such that, for any  $w \in T(\mathcal{T}_h)$ ,*

$$\|w\|_{0,\Omega} \leq C \tau^{\frac{1}{2}} d_\Omega \left[ (kh)^{-\frac{1}{2}} + (d_\Omega k)^{\frac{1}{2}} (d_\Omega^{-1} h)^s \right] \|w\|_{DG} ,$$

for all  $s$  satisfying (6).

*Proof.* Let  $\phi$  be in  $L^2(\Omega)$ . Let  $v$  be the solution to the (adjoint) problem (3) with  $f = \phi$ ,  $g_R = 0$  and “ $-$ ” in the impedance condition on  $\Gamma_R$ . From (5) and Theorem 2.3, we know that  $v \in H^{\frac{3}{2}+s}(\Omega)$ , for all  $s$  satisfying (6) (with  $\min\{s_\Omega, r\} = s_\Omega$ ), and that

$$\begin{aligned} |v|_{1,\Omega} + k \|v\|_{0,\Omega} &\leq C d_\Omega \|\phi\|_{0,\Omega} , \\ |\nabla v|_{\frac{1}{2}+s,\Omega} &\leq C (1 + d_\Omega k) d_\Omega^{\frac{1}{2}-s} \|\phi\|_{0,\Omega} , \end{aligned} \tag{22}$$

with  $C > 0$  depending only on  $s$ ,  $\gamma_R$  and  $\vartheta$ , but independent of  $k$ ,  $\phi$  and  $v$ . Multiplying by  $w \in T(\mathcal{T}_h)$ , integrating by parts twice the first equation of (3) element by element (using  $\Delta w + k^2 w = 0$  in each  $K \in \mathcal{T}_h$ ), and taking into account that  $\nabla v \cdot \mathbf{n} = ik\vartheta v$  on  $\Gamma_R$  and  $v = 0$  on  $\Gamma_D$ , we obtain

$$\begin{aligned} |(w, \phi)_{0,\Omega}| &= \left| \sum_{K \in \mathcal{T}_h} \int_{\partial K} (\nabla w \cdot \mathbf{n} \bar{v} - w \overline{\nabla v \cdot \mathbf{n}}) \, dS \right| \\ &= \left| \int_{\mathcal{F}_h^I} ([\nabla_h w]_N \bar{v} - [w]_N \cdot \overline{\nabla v}) \, dS \right. \\ &\quad \left. + \int_{\mathcal{F}_h^R} (\nabla_h w \cdot \mathbf{n} + ik\vartheta w) \bar{v} \, dS - \int_{\mathcal{F}_h^D} w \overline{\nabla v \cdot \mathbf{n}} \, dS \right| , \end{aligned}$$

from which, by the Cauchy-Schwarz inequality,

$$\begin{aligned} |(w, \phi)_{0,\Omega}| &\leq \sum_{f \in \mathcal{F}_h^I} \left( k^{-\frac{1}{2}} \left\| \beta^{\frac{1}{2}} [\nabla_h w]_N \right\|_{0,f} k^{\frac{1}{2}} \left\| \beta^{-\frac{1}{2}} v \right\|_{0,f} \right. \\ &\quad \left. + k^{\frac{1}{2}} \left\| \alpha^{\frac{1}{2}} [w]_N \right\|_{0,f} k^{-\frac{1}{2}} \left\| \alpha^{-\frac{1}{2}} \nabla v \cdot \mathbf{n} \right\|_{0,f} \right) \\ &\quad + \sum_{f \in \mathcal{F}_h^R} \left( k^{-\frac{1}{2}} \left\| \delta^{\frac{1}{2}} \vartheta^{-\frac{1}{2}} \nabla w \cdot \mathbf{n} \right\|_{0,f} k^{\frac{1}{2}} \left\| \delta^{-\frac{1}{2}} \vartheta^{\frac{1}{2}} v \right\|_{0,f} \right) \end{aligned}$$



$$\begin{aligned}
& + k^{\frac{1}{2}} \left\| \delta^{\frac{1}{2}} \vartheta^{\frac{1}{2}} w \right\|_{0,f} k^{\frac{1}{2}} \left\| \delta^{-\frac{1}{2}} \vartheta^{\frac{1}{2}} v \right\|_{0,f} \\
& + \sum_{f \in \mathcal{F}_h^D} k^{\frac{1}{2}} \left\| \alpha^{\frac{1}{2}} w \right\|_{0,f} k^{-\frac{1}{2}} \left\| \alpha^{-\frac{1}{2}} \nabla v \cdot \mathbf{n} \right\|_{0,f} \\
& \leq \|w\|_{DG} \mathcal{G}(v)^{\frac{1}{2}},
\end{aligned}$$

where we have set

$$\begin{aligned}
\mathcal{G}(v) & := \sum_{f \in \mathcal{F}_h^I} \left( k \left\| \beta^{-\frac{1}{2}} v \right\|_{0,f}^2 + k^{-1} \left\| \alpha^{-\frac{1}{2}} \nabla v \cdot \mathbf{n} \right\|_{0,f}^2 \right) \\
& + \sum_{f \in \mathcal{F}_h^R} 2k \left\| \delta^{-\frac{1}{2}} \vartheta^{\frac{1}{2}} v \right\|_{0,f}^2 + \sum_{f \in \mathcal{F}_h^D} k^{-1} \left\| \alpha^{-\frac{1}{2}} \nabla v \cdot \mathbf{n} \right\|_{0,f}^2.
\end{aligned}$$

We recall the trace inequality

$$\|v\|_{0,\partial K}^2 \leq C \left( h_K^{-1} \|v\|_{0,K}^2 + h_K |v|_{1,K}^2 \right) \quad \forall K \in \mathcal{T}_h, \quad (23)$$

with  $C > 0$  depending only on  $\sigma$  in (18) (see [4, Th. 1.6.6]); moreover, since  $v \in H^{\frac{3}{2}+s}(\Omega)$  for all  $s$  satisfying (6), it holds

$$\|\nabla v\|_{0,\partial K}^2 \leq C \left( h_K^{-1} \|\nabla v\|_{0,K}^2 + h_K^{2s} |\nabla v|_{\frac{1}{2}+s,K}^2 \right) \quad \forall K \in \mathcal{T}_h, \quad (24)$$

with  $C > 0$  depending only on  $\sigma$ ,  $s$ , and the reference element associated with to  $K$ . This estimate can be concluded from [22, Th. A.2] after mapping to that reference element and using a scaling argument for the homogeneous semi-norms, which is possible thanks to shape-regularity (18). Recall that any  $K$  is the affine image of one of a few reference elements.

Using (23) and (24), and taking into account the bounds for  $\vartheta$  and the local quasi-uniformity assumption (19), we obtain

$$\begin{aligned}
\mathcal{G}(v) & \leq C \tau \sum_{K \in \mathcal{T}_h} \left( \left\| \alpha^{-\frac{1}{2}} \right\|_{L^\infty(\partial K \cap (\mathcal{F}_h^I \cup \mathcal{F}_h^D))}^2 + \left\| \beta^{-\frac{1}{2}} \right\|_{L^\infty(\partial K \cap \mathcal{F}_h^I)}^2 \right. \\
& \quad \left. + \left\| \delta^{-\frac{1}{2}} \right\|_{L^\infty(\partial K \cap \mathcal{F}_h^R)}^2 \right) \\
& \cdot \left[ \frac{k}{h_K} \|v\|_{0,K}^2 + \left( kh_K + \frac{1}{kh_K} \right) |v|_{1,K}^2 + \frac{h_K^{2s}}{k} |\nabla v|_{\frac{1}{2}+s,K}^2 \right],
\end{aligned}$$

with  $C > 0$  depending only on  $\vartheta$ ,  $s$  and  $\sigma$  (see (18)), but independent of  $h$ ,  $p$ ,  $k$  and  $v$ . The assumption (21) on the flux parameters immediately gives

$$\left\| \alpha^{-\frac{1}{2}} \right\|_{L^\infty(\partial K \cap (\mathcal{F}_h^I \cup \mathcal{F}_h^D))}^2, \left\| \beta^{-\frac{1}{2}} \right\|_{L^\infty(\partial K \cap \mathcal{F}_h^I)}^2, \left\| \delta^{-\frac{1}{2}} \right\|_{L^\infty(\partial K \cap \mathcal{F}_h^R)}^2 \leq C \frac{h_K}{h},$$

which leads to the estimate

$$\mathcal{G}(v) \leq C \tau \sum_{K \in \mathcal{T}_h} \left[ \frac{k}{h} \|v\|_{0,K}^2 + \left( \frac{kh_K^2}{h} + \frac{1}{kh} \right) |v|_{1,K}^2 + \frac{h_K^{2s+1}}{kh} |\nabla v|_{\frac{1}{2}+s,K}^2 \right],$$

where  $C$  now also depends on  $\mathbf{a}$ ,  $\mathbf{b}$  and  $\mathbf{d}$ . By definition,  $h_K \leq h$ , and therefore (22) gives

$$\mathcal{G}(v) \leq C \tau d_\Omega^2 (k^{-1}h^{-1} + d_\Omega^{1-2s}kh^{2s}) \|\phi\|_{0,\Omega}^2.$$

Consequently, for all  $\phi \in L^2(\Omega)$ , we obtain

$$\frac{|(w, \phi)_{0,\Omega}|}{\|\phi\|_{0,\Omega}} \leq C \tau^{\frac{1}{2}} d_\Omega (k^{-\frac{1}{2}}h^{-\frac{1}{2}} + d_\Omega^{\frac{1}{2}-s}k^{\frac{1}{2}}h^s) \|w\|_{DG},$$

and the result readily follows.  $\square$

**Theorem 4.5.** *Assume that the analytical solution  $u$  to (2) belongs to  $T(\mathcal{T}_h)$  and let  $u_{hp}$  be the solution to (14); then, there exists a constant  $C > 0$  depending only on  $\sigma$ ,  $s$ ,  $\vartheta$ ,  $\gamma_R$  and the flux parameters  $\mathbf{a}$ ,  $\mathbf{b}$  and  $\mathbf{d}$  (thus independent of  $h$ ,  $p$  and  $k$ ), such that*

$$\|u - u_{hp}\|_{0,\Omega} \leq C \tau^{\frac{1}{2}} d_\Omega \left[ (kh)^{-\frac{1}{2}} + (d_\Omega k)^{\frac{1}{2}} (d_\Omega^{-1}h)^s \right] \inf_{v_{hp} \in V_p(\mathcal{T}_h)} \|u - v_{hp}\|_{DG+},$$

for all  $s$  satisfying (6).

*Proof.* The result follows from Lemma 4.4 applied to  $u - u_{hp} \in T(\mathcal{T}_h)$  and Proposition 4.3.  $\square$

*Remark 4.6.* In order to model the propagation of a wave through different materials, it is possible to consider a piecewise constant wavenumber  $k$  in the boundary value problem (2). If the mesh  $\mathcal{T}_h$  resolves the material structure, i.e., in the interior of every element the wavenumber is constant, the formulation of the TDG method and the most part of its analysis carried out in this paper can be extended to this setting after small modification (e.g.,

$k$  must be placed inside the jump and the average operators in the definition of the numerical fluxes). The only step that is not currently available is the wavenumber-explicit stability bound based on Rellich identities corresponding to Theorem 2.2, which was used to make explicit the dependence on  $k$  of the constants in the duality argument of Lemma 4.4 and thus in the  $L^2(\Omega)$ -norm error estimate of Theorem 4.5.

## 5. Outlook: $hp$ -approximation estimates

As mentioned in the introduction, the results presented in the previous sections are essential tools for a complete  $hp$ -convergence theory of the TDG method for the acoustic scattering problem. In fact, with Theorem 4.5 on hand, predicting the convergence of a TDG discretization on  $hp$ -meshes and distribution of the local resolutions boils down to investigation of the best approximation error  $\inf_{v_{hp} \in V_p(\mathcal{T}_h)} \|u - v_{hp}\|_{DG^+}$  for a concrete choice of local Trefftz spaces.

In this section, we consider spaces spanned by plane waves and review the best approximation results of [26, 27] (see also [25, Ch. 3]) for solutions which are at least in  $H^2(\Omega)$ . What is still missing are  $h$ -version plane wave local best approximation estimates for Helmholtz solutions in  $H^{\frac{3}{2}+s}$ ,  $0 < s < 1/2$ , to be used within elements abutting corners of  $\Gamma_D$ , where the solution  $u$  has low regularity.

In order to avoid technicalities, we restrict ourselves to two-dimensional domains, meshes whose elements are affine images of a few convex reference elements, and to uniformly spaced plane wave propagation directions<sup>5</sup>.

For each element  $K \in \mathcal{T}_h$ , define a local “plane wave degree”  $q_K \in \mathbb{N}$  and a Trefftz space with  $p_K := 2q_K + 1$  uniformly spaced plane waves:

$$V_p(\mathcal{T}_h) := \left\{ v_{hp} \in L^2(\Omega) : v_{hp}|_K(\mathbf{x}) = \sum_{n=1}^{p_K} \alpha_{K,n} e^{ik\mathbf{x} \cdot \mathbf{d}_{K,n}}, \alpha_{K,n} \in \mathbb{C} \forall K \in \mathcal{T}_h \right\}, \quad (25)$$

where

$$\mathbf{d}_{K,n} = \left( \cos \frac{2\pi n}{p_K}, \sin \frac{2\pi n}{p_K} \right), \quad n \in \{1, \dots, p_K\}.$$

---

<sup>5</sup>Everything that follows can be generalized to three dimensional problems, meshes with star-shaped elements, general choices of plane wave propagation directions, and also to circular and spherical wave bases.

Assume that, in each element,

$$u|_K \in H^{s_K+1}(K), \quad 1 \leq s_K \in \mathbb{N}. \quad (26)$$

Assume also that

$$q_K \geq 2s_K + 1 \quad \forall K \in \mathcal{T}_h,$$

and set

$$\widehat{q}_K := \frac{q_K}{\log(q_K + 2)}.$$

With the new definition of the flux parameters  $\alpha$ ,  $\beta$  and  $\delta$  (see (21)), and for  $h_K$  and  $q_K$  varying across the mesh, the best approximation estimate in  $DG^+$ -norm of [25, Lemma 4.4.1] becomes

$$\begin{aligned} \inf_{v_{hp} \in V_p(\mathcal{T}_h)} \|u - v_{hp}\|_{DG^+} &\leq \tau^{\frac{1}{2}} k^{-\frac{1}{2}} \sum_{K \in \mathcal{T}_h} \widetilde{C}_K (1 + (kh_K)^{\frac{15}{2}}) e^{\frac{7}{4}kh_K} \left(\frac{h}{h_K}\right)^{\frac{1}{2}} h_K^{s_K - \frac{1}{2}} \\ &\cdot \left[ \left(\frac{1}{\widehat{q}_K}\right)^{s_K - \frac{1}{2}} + (1 + (kh_K)^{q_K - s_K + 2}) \left(\frac{\sigma e}{2(q_K + 1)}\right)^{\frac{q_K}{2}} \right] \|u\|_{s_K + 1, k, K}, \end{aligned} \quad (27)$$

where, for every  $K \in \mathcal{T}_h$ , the constants  $\widetilde{C}_K > 0$  depend only on the reference element for  $K$ ,  $s_K$  and the maximum and minimum values on  $\partial K$  of  $\mathbf{a}$ ,  $\mathbf{b}$ ,  $\mathbf{d}$  and  $\vartheta$ .

The first term in the square brackets of (27) decays algebraically for increasing  $q_K$ , while the second one decays exponentially; thus, for  $q_K$  large enough, the latter can be bounded by the former. This is the situation we consider in the following proposition, which is obtained by inserting the bound (27) within Proposition 4.3 and Theorem 4.5.

**Proposition 5.1.** *Assume that the analytical solution  $u$  to (2) satisfies the smoothness assumption (26), and let  $u_{hp}$  be the solution to (14) with  $V_p(\mathcal{T}_h)$  given by (25). Then, if  $\min_{K \in \mathcal{T}_h} q_K$  is large enough, the following error bounds hold true:*

$$\|u - u_{hp}\|_{DG^+} \leq \left(\frac{\tau h}{k}\right)^{\frac{1}{2}} \sum_{K \in \mathcal{T}_h} C_K h_K^{s_K - 1} \left(\frac{1}{\widehat{q}_K}\right)^{s_K - \frac{1}{2}} \|u\|_{s_K + 1, k, K}, \quad (28)$$

$$\|u - u_{hp}\|_{0, \Omega} \leq C_* \tau d_\Omega^2 \left[ (d_\Omega k)^{-1} + (d_\Omega^{-1} h)^{s + \frac{1}{2}} \right] \quad (29)$$

$$\cdot \sum_{K \in \mathcal{T}_h} C_K h_K^{s_K-1} \left( \frac{1}{\widehat{q}_K} \right)^{s_K-\frac{1}{2}} \|u\|_{s_K+1,k,K} ,$$

for all  $s$  satisfying (6). Here, for every  $K \in \mathcal{T}_h$ , the local constants  $C_K > 0$  depend only on the product  $kh_K$  (as increasing functions),  $s_K$ , the reference element for  $K$ , and the maximum and minimum values on  $\partial K$  of  $\mathbf{a}$ ,  $\mathbf{b}$ ,  $\mathbf{d}$  and  $\vartheta$ ; the global constant  $C_* > 0$  depends only on  $\sigma$ ,  $s$ ,  $\vartheta$ ,  $\gamma_R$  and the flux parameters  $\mathbf{a}$ ,  $\mathbf{b}$  and  $\mathbf{d}$ .

The plane wave local best approximation error estimates used to prove the bound (27) provide algebraic orders of convergence in  $q_K$  when the solution is  $H^{s_K+1}(K)$  in  $K$ . Whenever  $u|_K$  admits an analytic extension to an open set  $E_K \supset \overline{K}$ , then the convergence is exponential in  $q_K$ , as shown in [25, Remark 3.5.8]. Thus, defining

$$\begin{aligned} \mathcal{T}_h^E &:= \{K \in \mathcal{T}_h : u|_K \text{ can be analytically extended to } E_K\} , \\ \mathcal{T}_h^A &:= \mathcal{T}_h \setminus \mathcal{T}_h^E , \end{aligned}$$

we have the bound

$$\begin{aligned} \|u - u_{hp}\|_{DG^+} &\leq \left( \frac{\tau h}{k} \right)^{\frac{1}{2}} \left[ \sum_{K \in \mathcal{T}_h^A} C_K^A h_K^{s_K-1} \left( \frac{1}{\widehat{q}_K} \right)^{s_K-\frac{1}{2}} \|u\|_{s_K+1,k,K} \right. \\ &\quad \left. + \sum_{K \in \mathcal{T}_h^E} C_K^E (1 + (kh_K)^{q_K}) b_K^{-q_K} (\|u\|_{s_K+1,k,K} + \|u_K^*\|_{L^\infty(E_K)}) \right] , \end{aligned}$$

where  $u_K^*$  is the extension of  $u|_K$  to  $E_K$ . Here, the local constants  $C_K^A, C_K^E > 0$  are independent of  $q_K$  and  $u$ , and depend only on the product  $kh_K$  (as increasing functions), the reference element for  $K$ ,  $s_K$ ,  $\mathbf{a}|_{\partial K}$ ,  $\mathbf{b}|_{\partial K}$ ,  $\mathbf{d}|_{\partial K}$ ,  $\vartheta|_{\partial K}$  and, in the case of  $C_K^E$ , on  $h_K$  and  $E_K$ ;  $b_K > 1$  depends only on  $K$  and  $E_K$ . A similar bound on the  $L^2(\Omega)$ -norm of the error follows from Theorem 4.5. If the artificial boundary  $\Gamma_R$  is chosen to be analytic, we expect  $\mathcal{T}_h^A$  to correspond to the set of the elements of  $\mathcal{T}_h$  that are incident to a vertex of  $\Gamma_D$ .

We hope that the above estimates, together with local best approximation estimates for  $H^{\frac{3}{2}+s}$ -Helmholtz solutions,  $0 < s < 1/2$ , may serve as tools for a proof of exponential convergence of plane wave TDG on  $hp$ -meshes and suitable plane wave degree distributions. Such a result would match what has been established for piecewise polynomial approximation [2, 34]. Hitherto it is still elusive.

*Remark 5.2.* In order to obtain an accurate approximation of the solution near the vertices of a polygonal scatterer, a possible alternative to the use of locally refined meshes is the use of Trefftz trial functions specially adapted to the geometry. These are the so-called “corner waves” and they are defined as product of Bessel function of fractional order in the radial direction and complex exponentials in the angular direction. They exhibit a singularity located in the corner, with the same exponent that is expected for the analytical solution of the boundary value problem.

This approach is very simple and provides extremely effective results, as demonstrated in [3]. However, the extension to three dimensional problems is absolutely nontrivial: this fact gives a further motivation to the study of a  $hp$ -version of the TDG method.

## References

- [1] D.N. Arnold, F. Brezzi, B. Cockburn, L.D. Marini, Unified analysis of discontinuous Galerkin methods for elliptic problems, *SIAM J. Numer. Anal.* 39 (2002) 1749–1779.
- [2] I. Babuška, M. Suri, The  $p$  and  $h$ - $p$  versions of the finite element method, basic principles and properties, *SIAM Rev.* 36 (1994) 578–632.
- [3] A.H. Barnett, T. Betcke, An exponentially convergent nonpolynomial finite element method for time-harmonic scattering from polygons, *SIAM J. Sci. Comput.* 32 (2010) 1417–1441.
- [4] S.C. Brenner, L.R. Scott, *Mathematical theory of finite element methods*, 3rd ed., *Texts Appl. Math.*, Springer-Verlag, New York, 2007.
- [5] A. Buffa, P. Monk, Error estimates for the ultra weak variational formulation of the Helmholtz equation, *M2AN, Math. Model. Numer. Anal.* 42 (2008) 925–940.
- [6] P. Castillo, B. Cockburn, I. Perugia, D. Schötzau, An a priori error analysis of the local discontinuous Galerkin method for elliptic problems, *SIAM J. Numer. Anal.* 38 (2000) 1676–1706.
- [7] O. Cessenat, B. Després, Application of an ultra weak variational formulation of elliptic PDEs to the two-dimensional Helmholtz equation, *SIAM J. Numer. Anal.* 35 (1998) 255–299.

- [8] O. Cessenat, B. Després, Using plane waves as base functions for solving time harmonic equations with the ultra weak variational formulation, *J. Comput. Acoust.* 11 (2003) 227–238.
- [9] S.N. Chandler-Wilde, P. Monk, Wave-number-explicit bounds in time-harmonic scattering, *SIAM J. Math. Anal.* 39 (2008) 1428–1455.
- [10] D. Colton, R. Kress, Inverse Acoustic and Electromagnetic Scattering Theory, volume 93 of *Applied Mathematical Sciences*, Springer, Heidelberg, 2nd edition, 1998.
- [11] P. Cummings, X. Feng, Sharp regularity coefficient estimates for complex-valued acoustic and elastic Helmholtz equations, *Math. Models Methods Appl. Sci.* 16 (2006) 139–160.
- [12] S. Esterhazy, J. Melenk, On stability of discretizations of the Helmholtz equation, in: I. Graham, T. Hou, O. Lakkis, R. Scheichl (Eds.), *Numerical Analysis of Multiscale Problems*, volume 83 of *Lecture Notes in Computational Science and Engineering*, Springer Verlag, 2012, pp. 285–324. ISBN 978-3-642-22060-9.
- [13] X.B. Feng, H.J. Wu,  $hp$ -Discontinuous Galerkin methods for the Helmholtz equation with large wave number, *Math. Comp.* 80 (2011) 1997–2024.
- [14] C.J. Gittelsohn, R. Hiptmair, I. Perugia, Plane wave discontinuous Galerkin methods: analysis of the  $h$ -version, *M2AN Math. Model. Numer. Anal.* 43 (2009) 297–332.
- [15] U. Hetmaniuk, Stability estimates for a class of Helmholtz problems, *Commun. Math. Sci.* 5 (2007) 665–678.
- [16] R. Hiptmair, A. Moiola, I. Perugia, Error analysis of Trefftz-discontinuous Galerkin methods for the time-harmonic Maxwell equations, *Math. Comp.* (2011). Accepted.
- [17] R. Hiptmair, A. Moiola, I. Perugia, Plane wave discontinuous Galerkin methods for the 2D Helmholtz equation: analysis of the  $p$ -version, *SIAM J. Numer. Anal.* 49 (2011) 264–284.

- [18] R. Hiptmair, A. Moiola, I. Perugia, Stability results for the time-harmonic Maxwell equations with impedance boundary conditions, *Math. Models Methods Appl. Sci.* 21 (2011) 2263–2287.
- [19] T. Huttunen, P. Monk, J.P. Kaipio, Computational aspects of the ultra-weak variational formulation, *J. Comput. Phys.* 182 (2002) 27–46.
- [20] W. McLean, *Strongly elliptic systems and boundary integral equations*, Cambridge University Press, Cambridge, 2000.
- [21] J.M. Melenk, *On Generalized Finite Element Methods*, Ph.D. thesis, University of Maryland, 1995.
- [22] J.M. Melenk, On approximation in meshless methods, in: *Frontiers of numerical analysis*, Universitext, Springer, Berlin, 2005, pp. 65–141.
- [23] J.M. Melenk, A. Parsania, S. Sauter, *Generalized DG-Methods for Highly Indefinite Helmholtz Problems based on the Ultra-Weak Variational Formulation*, ASC Report No. 06/2012, Institute for Analysis and Scientific Computing, TU Wien, 2012.
- [24] J.M. Melenk, S. Sauter, Wavenumber explicit convergence analysis for Galerkin discretizations of the Helmholtz equation, *SIAM J. Numer. Anal.* 49 (2011) 1210–1243.
- [25] A. Moiola, Trefftz-discontinuous Galerkin methods for time-harmonic wave problems, Ph.D. thesis, Seminar for applied mathematics, ETH Zürich, 2011. Available at <http://e-collection.library.ethz.ch/view/eth:4515>.
- [26] A. Moiola, R. Hiptmair, I. Perugia, Plane wave approximation of homogeneous Helmholtz solutions, *Z. Angew. Math. Phys.* 62 (2011) 809–837.
- [27] A. Moiola, R. Hiptmair, I. Perugia, Vekua theory for the Helmholtz operator, *Z. Angew. Math. Phys.* 62 (2011) 779–807.
- [28] P. Monk, *Finite element methods for Maxwell’s equations*, Numerical Mathematics and Scientific Computation, Oxford University Press, 2003.
- [29] P. Monk, D. Wang, A least squares method for the Helmholtz equation, *Comput. Methods Appl. Mech. Eng.* 175 (1999) 121–136.



- [30] J. Nečas, Les méthodes directes en théorie des équations elliptiques, Masson et Cie, Éditeurs, Paris, 1967.
- [31] J.C. Nédélec, Acoustic and Electromagnetic Equations: Integral Representations for Harmonic Problems, volume 44 of *Applied Mathematical Sciences*, Springer-Verlag, Berlin, 2001.
- [32] F. Rellich, Darstellung der Eigenwerte von  $\Delta u + \lambda u = 0$  durch ein Randintegral, *Math. Z.* 46 (1940) 635–636.
- [33] D. Schötzau, C. Schwab, T. Wihler, hp-dGFEM for second-order elliptic problems in polyhedra. I: Stability and quasioptimality on geometric meshes, Technical report 2009-28, SAM-ETH Zürich, 2009.
- [34] D. Schötzau, C. Schwab, T. Wihler, hp-dGFEM for second-order elliptic problems in polyhedra. II: Exponential convergence, Technical report 2009-29, SAM-ETH Zürich, 2009.
- [35] C. Schwab,  $p$ - and  $hp$ -Finite Element Methods. Theory and Applications in Solid and Fluid Mechanics, Numerical Mathematics and Scientific Computation, Clarendon Press, Oxford, 1998.
- [36] E.A. Spence, S.N. Chandler-Wilde, I.G. Graham, V.P. Smyshlyaev, A new frequency-uniform coercive boundary integral equation for acoustic scattering, *Comm. Pure Appl. Math.* 64 (2011) 1384–1415.

# Research Reports

No.	Authors/Title
12-06	<i>R. Hiptmair, A. Moiola and I. Perugia</i> Treffitz discontinuous Galerkin methods for acoustic scattering on locally refined meshes
12-05	<i>C. Winteler, R. Käppeli, A. Perego, A. Arcones, N. Vasset, N. Nishimura, M. Liebendörfer and F.-K. Thielemann</i> Magneto-rotationally driven Supernovae as the origin of early galaxy r-process elements?
12-04	<i>P. Grohs</i> Intrinsic localization of anisotropic frames
12-03	<i>P. Grohs</i> Geometric multiscale decompositions of dynamic low-rank matrices
12-02	<i>D. Kressner and C. Tobler</i> htucker - A Matlab toolbox for tensors in hierarchical Tucker format
12-01	<i>F.Y. Kuo, Ch. Schwab and I.H. Sloan</i> Quasi-Monte Carlo methods for high dimensional integration - the standard (weighted Hilbert space) setting and beyond
11-72	<i>P. Arbenz, A. Hildebrand and D. Obrist</i> A parallel space-time finite difference solver for periodic solutions of the shallow-water equation
11-71	<i>M.H. Gutknecht</i> Spectral deflation in Krylov solvers: A theory of coordinate space based methods
11-70	<i>S. Mishra, Ch. Schwab and J. Šukys</i> Multi-level Monte Carlo finite volume methods for shallow water equations with uncertain topography in multi-dimensions
11-69	<i>Ch. Schwab and E. Süli</i> Adaptive Galerkin approximation algorithms for partial differential equations in infinite dimensions
11-68	<i>A. Barth and A. Lang</i> Multilevel Monte Carlo method with applications to stochastic partial differential equations
11-67	<i>C. Effenberger and D. Kressner</i> Chebyshev interpolation for nonlinear eigenvalue problems
11-66	<i>R. Guberovic, Ch. Schwab and R. Stevenson</i> Space-time variational saddle point formulations of Stokes and Navier-Stokes equations